


MLS2000DIS

Red: ACTIVE
 Blue: NEUTRAL
 Yellow: } Polarity-free digital output
 Green: } Connection to ballast only.
 Do not connect to other detectors.
 White: +ve }
 Black: -ve } MLS BUS

Capacity - DSI = 4 Ballasts }
 DALI = 1 Ballast } MAXIMUM

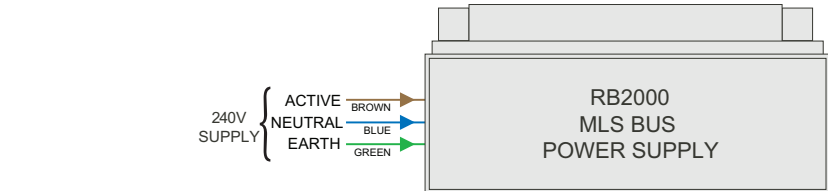

PROJECT: **GENERAL INFORMATION**
 WIRING DIAGRAM: **MLS2000DIS DETECTOR**
 Managed Lighting System - MLS2000 SERIES

Exclusively distributed by **Energy Conservation Solutions** www.ecsaustralia.net.au
 Unit 9, 103 Lewis Road, Knoxfield, Victoria, 3180 Ph: **(03) 9801 4838**