

LightSpot - Stand-alone precision lighting control by presence detection and photocell

HC5A Universal Hand-held Controller

The HC5A Universal Hand-held Controller offers the end user temporary on/off override and light level adjustment. In addition, it provides the ability to set and recall up to six different lighting 'scenes'. It is supplied complete with a wall bracket.

Please see information on individual detectors to check compatibility.

Operating Instructions

Point the handset at the detector and press a button. The beam angle is quite narrow, so accurate aiming is important.

Key Assignment

- Scene 1, short press to recall, long press to set.
 - Scene 2, short press to recall, long press to set.
- Scene 3, short press to recall, long press to set.
- Scene 4, short press to recall, long press to set.
- Scene 5, short press to recall, long press to set.
- Coolid of chart proces to recall, long proces to con-
- Scene 6, short press to recall, long press to set.
- Short press to turn off light/s associated with an individual sensor; long press to dim light/s associated with an individual sensor.
- Short press to turn on light/s associated with an individual sensor; long press to brighten light/s associated with an individual sensor.
- Short press to turn off group of lights; long press to dim group.
- + Short press to turn on group of lights; long press to brighten group.

Product Compatibility

Please note that many products respond only to keys and for individual dimming and/or turning on and off.

Technical Data


Dimensions: 135mm (h) x 44mm (w) x 6mm (d)

Weight: 45g approx

Battery type: 3V DC CR2032 Lithium Button Cell

Expected battery life: 3 years

Operating range: 2.5m when used with standard Ex-Or detectors and up to 16m when used with Hi-Bay types ('HB' suffix in the part number)

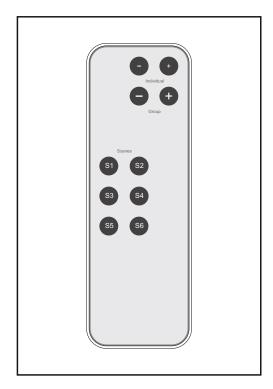

Ref: D4137A