

DS140 BASIC

360° Microwave Sensor



DS140

DS140 MIRCOWAVE SENSOR

Microwave technology enables the sensor range to be adjusted to ensure a tailored detection patten to suit many applications

FEATURES AND BENEFITS

- Reliable occupancy detection
- Integrated daylight sensing
- Available in surface and flush mount
- Simplified installation
- Manual override operation
- Detection range 2-16m at 3.5m mounting height


APPLICATIONS

- Offices
- Corridors
- Washrooms
- Storage areas

TECHNICAL DATA

Technology	Microwave
Coverage	360°
Detection range	2-16m diameter at a mounting height of 3.5m
Operating voltage	220 – 240V/ AC / 50 Hz
Delay time	10 seconds to 12 minutes
Load rating	Max 1200W Incandescent Max 300W Fluorescent
Lux level adjustment	3-2000 lux (adjustable)
HF System	5.8GHz CW radar, ISM band
Colour	White
Material	PC UV proof

DETECTION PATTERN

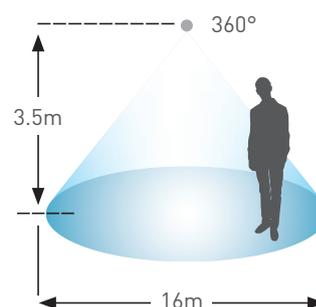


DS140 BASIC 360° Microwave Sensor

DA'SEL[®]


BASIC

DS140 MIRCOWAVE SENSOR

DIMENSIONS

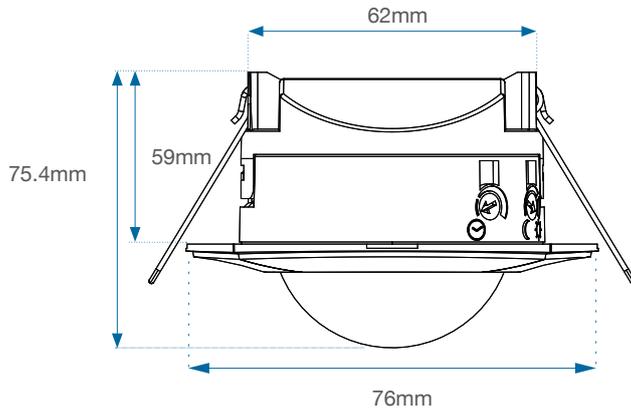

SWITCHABLE LOAD

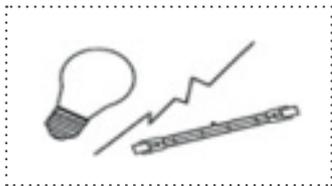

Max1200W



Max300W

DA'SEL[®]

DA'SEL, DA'SEL BASIC, DA'SEL STANDARD and DA'SEL PROFESSIONAL are registered trademarks of Energy Conservation Solutions.
* 1 year warranty on DA'SEL BASIC, 2 Years on DA'SEL STANDARD and 5 years on DA'SEL PROFESSIONAL