

# DS230 STANDARD

## 240° IP55 PIR sensor

**DA'SEL<sup>®</sup>**  
STANDARD



### DS230 IP55 PIR SENSOR

Innovative dual mount system requires only one sensor for either flush or surface mount applications

### FEATURES AND BENEFITS

- Reliable occupancy detection
- Integrated daylight sensing
- Weatherproof housing
- Detection range of 12m at 2.5m mounting height
- Manual override operation
- Wall, ceiling or corner mounting options including universal angle
- Simplified installation


### APPLICATIONS

- Garages
- Driveways
- Storage
- Outdoor living areas

### TECHNICAL DATA

Technology	PIR
Coverage	240°
Detection range	12m at mounting height of 2.5m
Operating voltage	220-240VAC / 50 Hz
Delay time	3 seconds to 20 minutes
Load rating	Max 1100W Incandescent Max 400W Fluorescent Max 400W Energy Saving Lamps Max 65W LED
Lux level adjustment	5-1000 lux (adjustable)
Colour	White
IP rating	IP55

### DETECTION PATTERN




# DS230 STANDARD 240° IP55 PIR


**DA'SEL<sup>®</sup>**  
STANDARD

## DS200 240° SWITCHING PIR SENSOR


### WALL MOUNTED

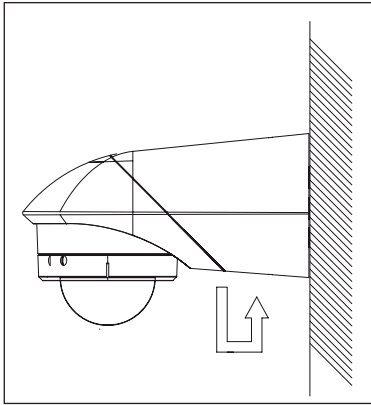

### CEILING MOUNTED

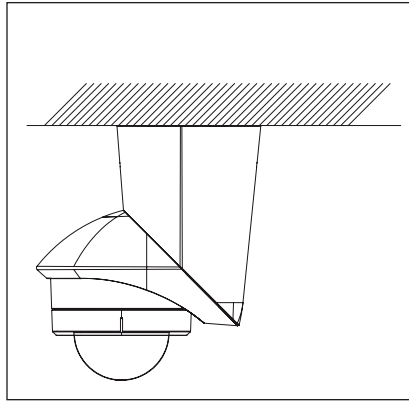

### CORNER MOUNTED

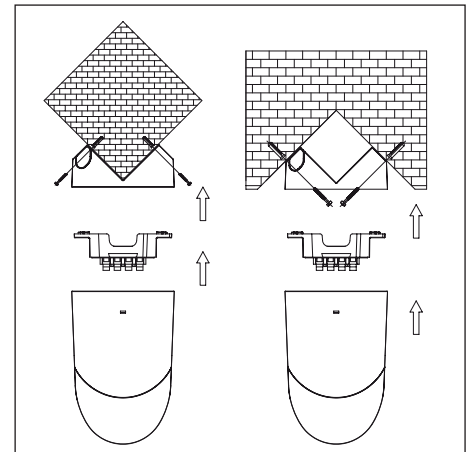

### SWITCHABLE LOAD



Max 1100W



Max 400W



Max 65W

**DA'SEL<sup>®</sup>**

DA'SEL, DA'SEL BASIC, DA'SEL STANDARD and DA'SEL PROFESSIONAL are registered trademarks of Energy Conservation Solutions.  
\* 1 year warranty on DA'SEL BASIC, 2 Years on DA'SEL STANDARD and 5 years on DA'SEL PROFESSIONAL