

## DATA SHEET

### Order description

PD-C 360i/8 mini DALI

### Item number

EP10427510

### GTIN

4015120427510



### Product description

- Presence detector with 360° field of detection for ceiling mounting
- Range of up to 8m in diameter at a recommended installation height of 3 m
- Automatic light control of DALI electronic ballasts to achieve a constant brightness level, depending on presence and natural light (with DALI-output)
- Can be combined with DALI push buttons
- HVAC and potential-free contact possible in conjunction with DALI switch from ESYLUX

### Technical data

GENERAL	
Conformity	CE, RoHS, WEEE
Special product features	Twilight switch
warranty	5-year
MOUNTING	
Installation type	Recessed mounting
Mounting location	Ceiling
Installation dimension	Installation depth 45 mm, Ø 25 mm
HOUSING	
Dimensions	Height/Depth 15 mm, Ø 33 mm
Weight	25 g
Material	UV-stabilised PE
Protection type	IP 55
Permissible ambient temperature	-25 °C...+50 °C
Relative humidity	5 - 95 %, non-condensing
Colour	Opal matt
Terminal	2,5 mm <sup>2</sup> / 1,5 mm <sup>2</sup>
ELECTRICAL VERSION	
Protection class	III
Nominal voltage	9,5 - 22,5 V
SENSORS	
Power consumption	0,3 W
Power consumption	12 mA
Detection angle	360°
Detection range diagonally	8 m

Detection range head-on	5 m
Detection range zone de présence	3 m
Field of detection	50 m <sup>2</sup>
Recommended installation height	3 m
Max. mounting height	3 m
Light measurement	mixed light
Level of brightness	10 - 2000 lx
Number of light channels	1
Number of switching contacts	0
Slave input	yes, via DALI
Fully automatic	yes
Semi-automatic	yes
Constant lighting control	true
Switching delay from "dark to light" [s]	300 s
Switching delay from "light to dark" [s]	30 s

### CONTROL

Channel 1	Lighting
Interface	Switching/Dimming
Contact	Bus system
Switch-off delay channel 1	60 s - 240 min
Orientation light	10 % to 40 % luminous efficiency
Switch-off delay time, orientation light	disabled/approx. 1 minute – 240 minutes
Orientation light	10 % to 40 % luminous efficiency
Switch-off delay time, orientation light	disabled/approx. 1 minute – 240 minutes
No. of electric ballasts	any number
Bus voltage	9.5–22.5 V DC
Master/slave function	true

## DATA SHEET


Order description	Item number	GTIN
PD-C 360i/8 mini DALI	EP10427510	4015120427510
Constant lighting control	true	
Manual override	yes, via IR	

Light channel	DALI
DALI output 1	DALI bus / Broadcast


### Accessories

Product designation	Item number	GTIN
ESY-Pen	EP10425356	4015120425356
Mobil-PDi/Dali	EP10425899	4015120425899
Mobil-PDi/MDi-universal	EP10433993	4015120433993
Mobil-PDi/user	EM10425547	4015120425547
SW DALI Full Automation	EP10427473	4015120427473
SW DALI Semi Automation	EP10427480	4015120427480
CU PS DALI	EC10430008	4015120430008

### Scale drawing



### Field of detection




- Operating area approx.  $\varnothing$  0.3 m
- Head-on to detector approx.  $\varnothing$  0.5 m
- Passage area / diagonally to detector approx.  $\varnothing$  0.8 m

## DATA SHEET

Order description	Item number	GTIN
PD-C 360i/8 mini DALI	EP10427510	4015120427510

### Circuit diagram

---

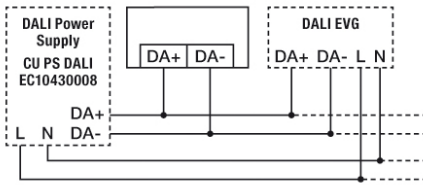

---

Standard operation

**Energy Conservation Solutions Pty Ltd**  
Exclusive Distributor for ESYLUX in Australia Locations:  
VIC/TAS, NSW, QLD, ACT, SA/NT & WA  
Phone: **1300 306 136**  
For contact details visit: [www.ecs.net.au](http://www.ecs.net.au)