

DATA SHEET

OL 200 LED 5K

Order description


OL 200 LED 5K white

Item number

EL10710100

GTIN

4015120710100

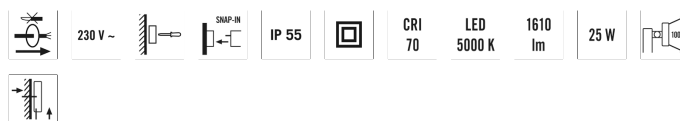

Product description

- LED light
- Design lamp made of die-cast aluminium and plastic
- 25 W, light colour approx. 5000 K white

Technical data

GENERAL	
Conformity	CE, RoHS, WEEE
warranty	3-year
MOUNTING	
Installation type	Surface mounting
Mounting location	Wall
HOUSING	
Dimensions	Length 143 mm x Width 184 mm x Height/Depth 205 mm
Weight	738 g
Material	Aluminium and UV-stabilised plastic
Protection type	IP 55
Permissible ambient temperature	-25 °C...+50 °C
Colour	white, similar to RAL 9016
Terminal	2,5 mm ² / 1,5 mm ²

Glow wire test in accordance with IEC 60695-2-10 650 °C - 30 s

ELECTRICAL VERSION

Protection class	II
Nominal voltage	230 - 230 V / 50 Hz


LIGHT

Diffusor	opal
Light emission	direkt
Beam angle	90 °
Flicker factor	<10 %
Rated output	25 W
Luminous Flux (light)	1510 lm
Luminous efficacy	60 lm/W
LED service life	L80B10 = 50.000 h
Colour temperature	5000 K
Colour rendering index Ra	> 70
Energy efficiency class	A++ to A


DATA SHEET
OL 200 LED 5K

Order description	Item number	GTIN
OL 200 LED 5K white	EL10710100	4015120710100


Scale drawing



Light distribution

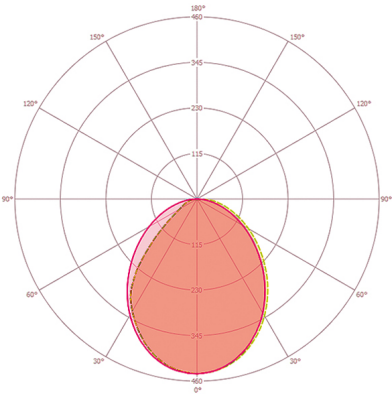


Circuit diagram



Standard operation

Circuit diagram

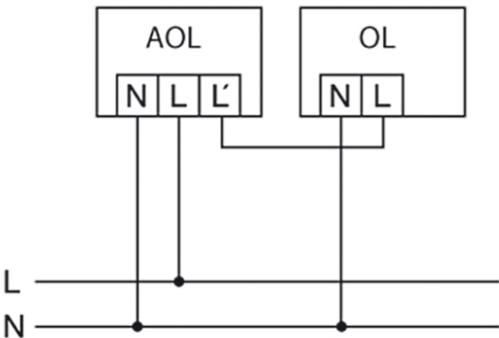

Controlled by an automatic light, e.g. the AOL 100 or AOL 200