

DATA SHEET

OFR 250 LED 5K

Order description


OFR 250 LED 5K black

Item number

EL10710216

GTIN

4015120710216

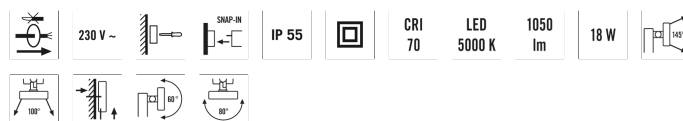

Product description

- LED spotlight
- Design lamp made of aluminum extruded profile and plastic
- 18 W, light colour approx. 5000 K white
- Rear Projection technology

Technical data

GENERAL	
Conformity	CE, RoHS, WEEE
warranty	3-year
MOUNTING	
Installation type	Surface mounting
Mounting location	Wall
HOUSING	
Dimensions	Length 137 mm x Width 132 mm x Height/Depth 198 mm
Weight	765 g
Material	Aluminium and UV-stabilised plastic
Protection type	IP 55
Permissible ambient temperature	-25 °C...+50 °C
Colour	Black, similar to RAL 9005
Terminal	2,5 mm ² / 1,5 mm ²


ELECTRICAL VERSION	
Protection class	II
Nominal voltage	230 - 230 V / 50 Hz
LIGHT	
Diffusor	transparent
Light emission	direkt
Beam angle	110 °
Flicker factor	<10 %
Rated output	18 W
Luminous Flux (light)	1050 lm
Luminous efficacy	58 lm/W
LED service life	L80B10 = 50.000 h
Colour temperature	5000 K
Colour rendering index Ra	> 70
Energy efficiency class	A++ to A

DATA SHEET


OFR 250 LED 5K

Order description	Item number	GTIN
OFR 250 LED 5K black	EL10710216	4015120710216


Scale drawing



Light distribution

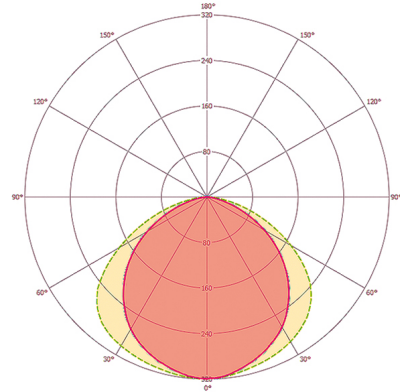


Circuit diagram



Standard operation

Circuit diagram

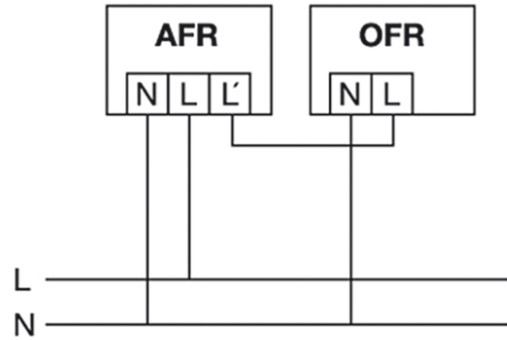

Activation of a maximum of 6 OFR 250 lights or 4 OFR 350 lights

Energy Conservation Solutions Pty Ltd

Exclusive Distributor for **ESYLUX** in Australia Locations:

VIC/TAS, NSW, QLD, ACT, SA/NT & WA

Phone: **1300 306 136**

For contact details visit: www.ecs.net.au