

DATA SHEET

OL 200 LED 3K

Order description


OL 200 LED 3K white

Item number

EL10710803

GTIN

4015120710803

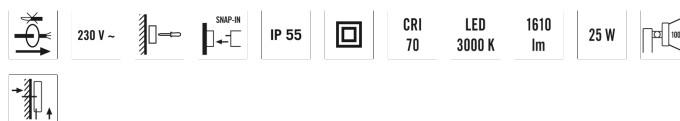

Product description

- LED light
- Design lamp made of die-cast aluminium and plastic
- 25 W, light colour approx. 3000 K white

Technical data

GENERAL	
Conformity	CE, RoHS, WEEE
warranty	3-year
MOUNTING	
Installation type	Surface mounting
Mounting location	Wall
HOUSING	
Dimensions	Length 143 mm x Width 184 mm x Height/Depth 205 mm
Weight	738 g
Material	Aluminium and UV-stabilised plastic
Protection type	IP 55
Permissible ambient temperature	-25 °C...+50 °C
Colour	white, similar to RAL 9016
Terminal	2,5 mm ² / 1,5 mm ²

Glow wire test in accordance with IEC 60695-2-10 650 °C - 30 s

ELECTRICAL VERSION

Protection class	II
Nominal voltage	230 - 230 V / 50 Hz

LIGHT

Diffusor	opal
Light emission	direkt
Beam angle	90 °
Flicker factor	<10 %
Rated output	25 W
Luminous Flux (light)	1430 lm
Luminous efficacy	57 lm/W
LED service life	L80B10 = 50.000 h
Colour temperature	3000 K
Colour rendering index Ra	> 80
Energy efficiency class	A++ to A

DATA SHEET

OL 200 LED 3K

Order description

OL 200 LED 3K white


Item number

EL10710803


GTIN

4015120710803

Scale drawing



Light distribution

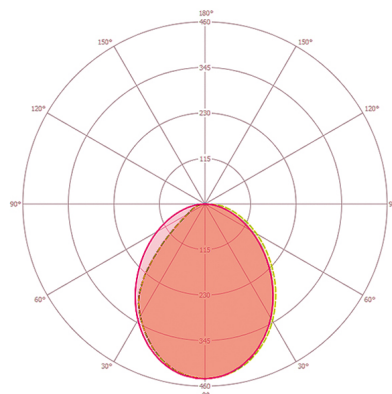

Energy Conservation Solutions Pty Ltd

Exclusive Distributor for **ESYLUX** in Australia Locations:

VIC/TAS, NSW, QLD, ACT, SA/NT & WA

Phone: **1300 306 136**

For contact details visit: **www.ecs.net.au**