

DATA SHEET

OL 200 LED 3K

Order description


OL 200 LED 3K black

Item number

EL10710810

GTIN

4015120710810

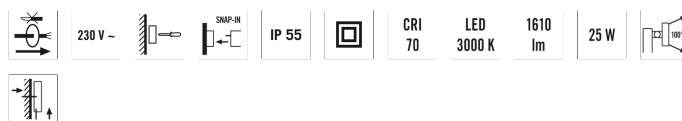

Product description

- LED light
- Design lamp made of die-cast aluminium and plastic
- 25 W, light colour approx. 3000 K white

Technical data

GENERAL	
Conformity	CE, RoHS, WEEE
warranty	3-year
MOUNTING	
Installation type	Surface mounting
Mounting location	Wall
HOUSING	
Dimensions	Length 143 mm x Width 184 mm x Height/Depth 205 mm
Weight	747 g
Material	Aluminium and UV-stabilised plastic
Protection type	IP 55
Permissible ambient temperature	-25 °C...+50 °C
Colour	Black, similar to RAL 9005
Terminal	2,5 mm ² / 1,5 mm ²

Glow wire test in accordance with IEC 60695-2-10 650 °C - 30 s

ELECTRICAL VERSION

Protection class	II
Nominal voltage	230 - 230 V / 50 Hz

LIGHT


Diffusor	opal
Light emission	direkt
Beam angle	90 °
Flicker factor	<10 %
Rated output	25 W
Luminous Flux (light)	1430 lm
Luminous efficacy	57 lm/W
LED service life	L80B10 = 50.000 h
Colour temperature	3000 K
Colour rendering index Ra	> 80
Energy efficiency class	A++ to A

DATA SHEET


OL 200 LED 3K

Order description	Item number	GTIN
OL 200 LED 3K black	EL10710810	4015120710810

Scale drawing



Light distribution

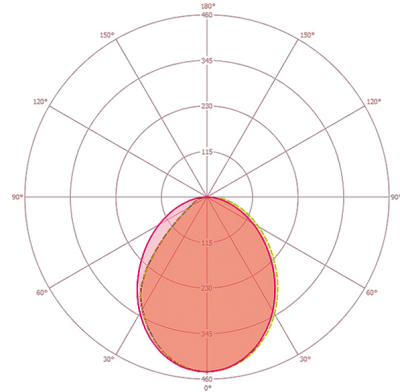

Energy Conservation Solutions Pty Ltd

Exclusive Distributor for ESYLUX in Australia Locations:

VIC/TAS, NSW, QLD, ACT, SA/NT & WA

Phone: **1300 306 136**

For contact details visit: www.ecs.net.au