

## DATA SHEET

### OFL SUN LED 10W 5K black

#### Order description

OFL SUN LED 10W 5 K BK

#### Item number

EL10810060

#### GTIN

4015120810060



#### Product description

- LED spotlight with high-quality aluminium die-cast housing
- 10 W LED luminous efficiency corresponds to 63 W light bulb, light colour approx. 5000 K white
- High light yield of 90 lm/W, excellent colour rendering index Ra 80

#### Technical data

GENERAL	
Conformity	CE, RoHS, WEEE
warranty	3-year
MOUNTING	
Installation type	Surface mounting
Mounting location	Wall
HOUSING	
Dimensions	Length 150 mm x Width 133 mm x Height/Depth 75 mm
Weight	480 g
Material	Aluminium and UV-stabilised plastic
Protection type	IP 65
Permissible ambient temperature	-25 °C...+50 °C
Colour	Black, similar to RAL 9005
Terminal	2,5 mm <sup>2</sup> / 1,5 mm <sup>2</sup>

ELECTRICAL VERSION	
Protection class	I
Nominal voltage	230 - 230 V / 50 Hz
LIGHT	
Diffusor	transparent
Light emission	direkt
Beam angle	95 °
Flicker factor	<20 %
Rated output	9 W
Luminous Flux (light)	1020 lm
Luminous efficacy	113 lm/W
LED service life	L80B50 = 50.000 h
Colour temperature	5000 K
Colour rendering index Ra	> 80
Energy efficiency class	A++ to A

#### Accessories


Product designation	Item number	GTIN
Wall Arm 700 BK	EL10810534	4015120810534
Ground Spike BK	EL10810558	4015120810558

## DATA SHEET


### OFL SUN LED 10W 5K black

Order description	Item number	GTIN
OFL SUN LED 10W 5 K BK	EL10810060	4015120810060


#### Scale drawing

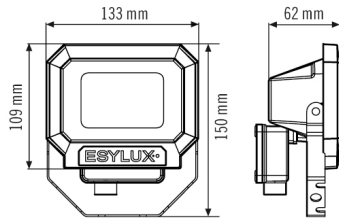

#### Light distribution

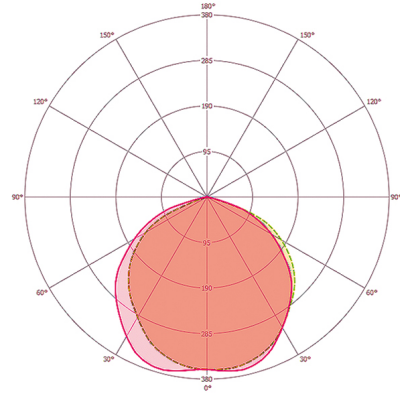

#### Circuit diagram



Standard operation with on/off switch

**Energy Conservation Solutions Pty Ltd**  
Exclusive Distributor for ESYLUX in Australia Locations:  
VIC/TAS, NSW, QLD, ACT, SA/NT & WA  
Phone: **1300 306 136**  
For contact details visit: [www.ecs.net.au](http://www.ecs.net.au)