

DATA SHEET

OFL SUN LED 30W 3K white

Order description


OFL SUN LED 30 W 3K WH

Item number

EL10810107

GTIN

4015120810107

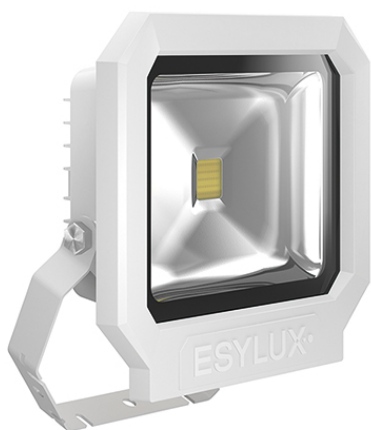

Product description

- LED spotlight with high-quality aluminium die-cast housing
- 30 W LED luminous efficiency corresponds to 139 W light bulb, light colour approx. 3000 K white
- High light yield of 80 lm/W, excellent colour rendering index Ra 80

Technical data

GENERAL	
Conformity	CE, RoHS, WEEE
warranty	3-year
MOUNTING	
Installation type	Surface mounting
Mounting location	Wall
HOUSING	
Dimensions	Length 252 mm x Width 227 mm x Height/Depth 86 mm
Weight	1680 g
Material	Aluminium and UV-stabilised plastic
Protection type	IP 65
Permissible ambient temperature	-25 °C...+50 °C
Colour	white, similar to RAL 9016
Terminal	2,5 mm ² / 1,5 mm ²

ELECTRICAL VERSION	
Protection class	I
Nominal voltage	230 - 230 V / 50 Hz
LIGHT	
Diffusor	transparent
Light emission	direkt
Beam angle	110 °
Flicker factor	<20 %
Rated output	28 W
Luminous Flux (light)	3370 lm
Luminous efficacy	120 lm/W
LED service life	L80B50 = 50.000 h
Colour temperature	3000 K
Colour rendering index Ra	> 80
Energy efficiency class	A++ to A

Accessories


Product designation	Item number	GTIN
Wall Arm 700 WH	EL10810527	4015120810527
Ground Spike WH	EL10810541	4015120810541

DATA SHEET


OFL SUN LED 30W 3K white

Order description	Item number	GTIN
OFL SUN LED 30 W 3K WH	EL10810107	4015120810107


Scale drawing

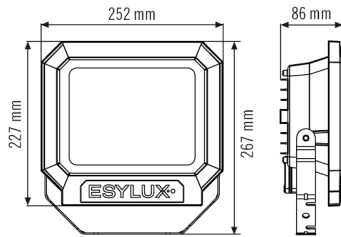

Light distribution

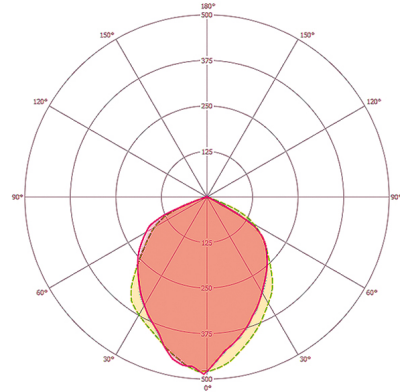

Circuit diagram



Standard operation with on/off switch

Energy Conservation Solutions Pty Ltd
Exclusive Distributor for ESYLUX in Australia Locations:
VIC/TAS, NSW, QLD, ACT, SA/NT & WA
Phone: **1300 306 136**
For contact details visit: www.ecs.net.au