



DATA SHEET

AFL SUN LED 50W 5K white

Order description

Item number


GTIN

AFL SUN LED 50W 5K WH

EL10810275

4015120810275





Product description

- LED floodlight with high-grade die-cast aluminium housing and integrated motion detector with 160° field of detection for convenient lighting control
- 50 W LED luminous efficiency corresponds to 240 W light bulb, light colour approx. 5000 K white
- High light yield of 90 lm/W, excellent colour rendering index Ra 80

Technical data

Height/	
ic	
-25 °C+40 °C	

Г		
sor tr	transparent	
emission d	irekt	
n angle 1	10 °	
er factor <	20 %	
d output 4	5 W	
nous Flux (light) 5	630 lm	
nous efficacy 1	25 lm/W	
service life L	L80B50 = 50.000 h	
ir temperature 5	000 K	
ır rendering index Ra >	- 80	
gy efficiency class A	++ to A	
ORS		
ction angle 1	60°	
tion range diagonally 1	2 m	
of detection 5	0 m²	
•	nechanically with included cut to size lens nask	
mmended installation height 2	,5 m	
mounting height 4	m	
per of parallel switchable detectors 1	0	
nous efficacy 1. service life Li or temperature 5 or rendering index Ra > gy efficiency class A ORS Stion angle 1. Stion range diagonally 1. of detection 5 e adjustment m mmended installation height 2. mounting height 4.	25 lm/W 80B50 = 50.000 h 000 K 80 ++ to A 60° 2 m 0 m² nechanically with included cut to size lensingsk	





DATA SHEET

AFL SUN LED 50W 5K white


Order description Item number GTIN

AFL SUN LED 50W 5K WH EL10810275 4015120810275


Accessories

Product designation	Item number	GTIN
Wall Arm 700 WH	EL10810527	4015120810527
Ground Spike WH	EL10810541	4015120810541

Scale drawing




Field of detection

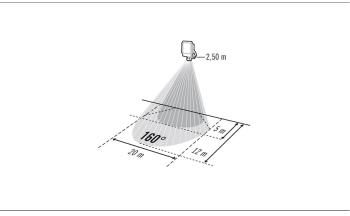

- Head-on to detector
- Passage area / diagonally to detector

Light distribution



Energy Conservation Solutions Pty Ltd

Exclusive Distributor for **ESYLUX** in Australia Locations: VIC/TAS, NSW, QLD, ACT, SA/NT & WA
Phone: **1300 306 136**

For contact details visit: www.ecs.net.au