

DATA SHEET

| Order description | Item number | GTIN |
|---------------------------|-------------|---------------|
| IDLALI30009830WHTODALI000 | E010302121 | 4015120302121 |



Product description

- LED downlight, 9 W, for recessed ceiling mounting with transparent (CLEAR) diffuser
- Beam angle 24°
- Integrated ballast (DALI), installation without further accessories
- High-quality housing, aluminium lamp body, white powder-coated (RAL 9003)
- Correlated colour temperature 3000 K

Technical data

| GENERAL | |
|--|---|
| Conformity | CE, RoHS, WEEE |
| warranty | 5-year |
| MOUNTING | |
| Installation type | Recessed mounting |
| Mounting location | Ceiling |
| Installation dimension | Installation depth 77 mm, Ø 68 mm |
| HOUSING | |
| Dimensions | x Width 75 mm x Height/Depth 79 mm, Ø 75 mm |
| Weight | 303 g |
| Material | powder-coated aluminium |
| Protection type | IP 20 / IP 44 below the ceiling (built-in) |
| Permissible ambient temperature | -20 °C...+40 °C |
| Colour | white, similar to RAL 9003 |
| Glow wire test in accordance with IEC 60695-2-10 | 850 °C - 5 s |

| ELECTRICAL VERSION | |
|---------------------------|--------------------------|
| Protection class | III |
| Nominal voltage | 110 - 240 V / 50 - 60 Hz |
| LIGHT | |
| Diffusor | transparent |
| Light emission | direkt |
| Beam angle | 24 ° |
| Unified Glare Rating | ≤ 16 |
| Flicker factor | <3 % |
| Rated output | 9 W |
| Luminous Flux (light) | 610 lm |
| Luminous efficacy | 67 lm/W |
| LED service life | L80B50 = 35.000 h |
| Colour temperature | 3000 K |
| Colour rendering index Ra | > 80 |
| Colour tolerance | SDCM <3 |
| Color Quality Scale | 85 |
| Energy efficiency class | A++ to A |

DATA SHEET

Order description

IDLALI30009830WHTODALI000


Item number

E010302121


GTIN

4015120302121

Scale drawing



Light distribution

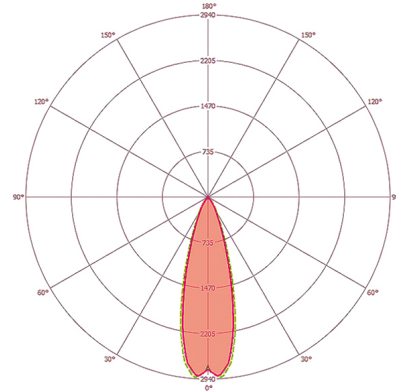

Energy Conservation Solutions Pty Ltd

Exclusive Distributor for ESYLUX in Australia Locations:

VIC/TAS, NSW, QLD, ACT, SA/NT & WA

Phone: 1300 306 136

For contact details visit: www.ecs.net.au