

## DATA SHEET

Order description	Item number	GTIN
IDLALI31009830WHT01-10CB0	E010302541	4015120302541



### Product description

- LED down light, 9 W, for recessed ceiling mounting with transparent (CLEAR) diffuser
- Beam angle 36°
- Integrated ballast (1-10V), installation without further accessories
- High-quality housing, aluminium lamp body, white powder-coated (RAL 9003)
- Colour temperature 3000 K
- With separate connection box for optimal through-wiring

### Technical data

GENERAL	
Conformity	CE, RoHS, WEEE
warranty	5-year
MOUNTING	
Installation type	Recessed mounting
Mounting location	Ceiling
Installation dimension	Installation depth 77 mm, Ø 68 mm
HOUSING	
Dimensions	x Width 75 mm x Height/Depth 79 mm, Ø 75 mm
Weight	218 g
Material	powder-coated aluminium
Protection type	IP 20 / IP 44 below the ceiling (built-in)
Permissible ambient temperature	-20 °C...+40 °C
Colour	white, similar to RAL 9003
Glow wire test in accordance with IEC 60695-2-10	850 °C - 5 s

ELECTRICAL VERSION	
Protection class	III
Nominal voltage	110 - 240 V / 50 - 60 Hz
LIGHT	
Diffusor	transparent
Light emission	direkt
Beam angle	36 °
Unified Glare Rating	≤ 16
Flicker factor	<3 %
Rated output	9 W
Luminous Flux (light)	610 lm
Luminous efficacy	67 lm/W
LED service life	L80B50 = 35.000 h
Colour temperature	3000 K
Colour rendering index Ra	> 80
Colour tolerance	SDCM <3
Color Quality Scale	85
Energy efficiency class	A++ to A

## DATA SHEET

**Order description**

IDLALI31009830WHT01-10CB0


**Item number**

E010302541


**GTIN**

4015120302541

**Scale drawing**



**Light distribution**

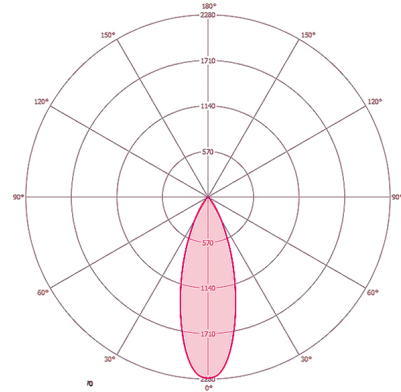

**Energy Conservation Solutions Pty Ltd**

Exclusive Distributor for **ESYLUX** in Australia Locations:

VIC/TAS, NSW, QLD, ACT, SA/NT & WA

Phone: **1300 306 136**

For contact details visit: [www.ecs.net.au](http://www.ecs.net.au)