

## DATA SHEET

### STINA 112 / 60° 15W 3K BLACK CLEAR ON/OFF

#### Order description

IDLSTI28015830BKT00000000

#### Item number

E010304088

#### GTIN

4015120304088



#### Product description

- LED downlight, 15 W, for recessed ceiling mounting with transparent (CLEAR) diffuser
- Beam angle 60°
- Integrated ballast (on/off), installation without further accessories
- High-quality housing, aluminium lamp body, black powder-coated (RAL 9005)
- Colour temperature 3000 K

#### Technical data

GENERAL	
Conformity	CE, RoHS, WEEE
warranty	5-year
MOUNTING	
Installation type	Recessed mounting
Installation position	Ceiling
Installation dimension	Installation depth 116,5 mm, Ø 112 mm
HOUSING	
Dimensions	Height/Depth 118,5 mm, Ø 130 mm
Weight	400 g
Housing material	powder-coated aluminium
Protection type	IP 20 / IP 44 below the ceiling (built-in)
Permissible ambient temperature	-20 °C...+40 °C
Colour	Black, similar to RAL 9005
Glow wire test in accordance with IEC 60695-2-10	850 °C - 5 s

#### ELECTRICAL VERSION

Protection class	III
Nominal voltage	110 - 240 V / 50 - 60 Hz

#### LIGHT


Diffusor	transparent
Light emission	Direct
Beam angle	60 °
Unified Glare Rating	≤ 16
Flicker factor	<3 %
Rated output	16,0 W
Luminous Flux (light)	1150 lm
Luminous efficacy	71 lm/W
LED service life	L80B50 = 35.000 h
Colour temperature	3000 K
Colour rendering index Ra	> 80
Colour tolerance	SDCM <3
Color Quality Scale	≥ 85
Energy efficiency class	A++ to A

## DATA SHEET


STINA 112 / 60° 15W 3K BLACK CLEAR ON/OFF

Order description	Item number	GTIN
IDLSTI28015830BKT00000000	E010304088	4015120304088

### Scale drawing



### Light distribution

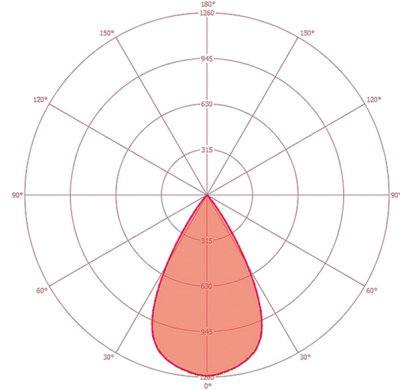

**Energy Conservation Solutions Pty Ltd**

Exclusive Distributor for ESYLUX in Australia Locations:  
VIC/TAS, NSW, QLD, ACT, SA/NT & WA

Phone: 1300 306 136

For contact details visit: [www.ecs.net.au](http://www.ecs.net.au)