

DATA SHEET

Order description

PDLISB04370830BKC00000000

Item number

E010306112

GTIN

4015120306112



Product description

- LED pendant light, LED output 72 W, for workplace-oriented lighting in offices and meeting rooms with glare-free direct component and indirect light
- Sleek, timeless design
- Ballast (on/off) integrated
- High-quality housing, aluminium lamp bodies, anthracite powder coated
- Colour temperature 3000 K
- Excellent light quality, no flickering

Technical data


GENERAL	
Conformity	CE, RoHS, WEEE
warranty	5-year
MOUNTING	
Installation type	Pendant
Mounting location	Ceiling
HOUSING	
Dimensions	Length 1206 mm x Width 166 mm x Height/Depth 30 mm
Weight	6000 g
Material	Aluminium
Surface finish	Powder-coated
Protection type	IP 20
Permissible ambient temperature	0 °C...+40 °C
Relative humidity	5 - 93 %, non-condensing
Colour	Black grey, similar to RAL 7016
Glow wire test in accordance with IEC 60695-2-10	650 °C - 30 s

ELECTRICAL VERSION	
Protection class	I
Nominal voltage	220 - 240 V / 50 - 60 Hz
Stand-by consumption	0 W
LIGHT	
Diffusor	micro-prismatic / transparent
Light emission	direkt/indirekt
Beam angle	80 °
Unified Glare Rating	≤ 19
Flicker factor	<3 %
Rated output	79 W
Luminous Flux (light)	8000 lm
Luminous efficacy	101 lm/W
LED service life	L80B10 = 50.000 h
Colour temperature	3000 K
Colour rendering index Ra	> 80
Colour tolerance	SDCM <3
Color Quality Scale	CQS > 80
Photobiological safety	Risk group 1
Energy efficiency class	A++ to A

DATA SHEET

Order description	Item number	GTIN
PDLISB04370830BKC00000000	E010306112	4015120306112

Scale drawing

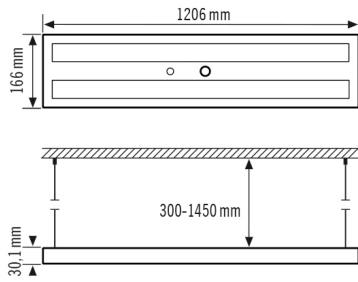

Light distribution

Energy Conservation Solutions Pty Ltd
Exclusive Distributor for ESYLUX in Australia Locations:
VIC/TAS, NSW, QLD, ACT, SA/NT & WA
Phone: **1300 306 136**
For contact details visit: www.ecs.net.au