

DATA SHEET

Order description

PDLISB04370840WHCODALI000

Item number

E010306167

GTIN

4015120306167



Product description

- LED pendant light, LED output 72 W, for workplace-oriented lighting in offices and meeting rooms with glare-free direct component and indirect light
- Sleek, timeless design
- Ballast (DALI) integrated
- High-quality housing, aluminium lamp bodies, powder-coated white
- Colour temperature 4000 K
- Excellent light quality, no flickering

Technical data

GENERAL	
Conformity	CE, RoHS, WEEE
warranty	5-year
MOUNTING	
Installation type	Pendant
Mounting location	Ceiling
HOUSING	
Dimensions	Length 1206 mm x Width 166 mm x Height/Depth 30 mm
Weight	6000 g
Material	Aluminium
Surface finish	Powder-coated
Protection type	IP 20
Permissible ambient temperature	0 °C...+40 °C
Relative humidity	5 - 93 %, non-condensing
Colour	white, similar to RAL 9003
Glow wire test in accordance with IEC 60695-2-10	650 °C - 30 s

ELECTRICAL VERSION	
Protection class	I
Nominal voltage	220 - 240 V / 50 - 60 Hz
Stand-by consumption	< 1 W
LIGHT	
Diffusor	micro-prismatic / transparent
Light emission	direkt/indirekt
Beam angle	80 °
Unified Glare Rating	≤ 19
Flicker factor	<3 %
Rated output	78 W
Luminous Flux (light)	8830 lm
Luminous efficacy	113 lm/W
LED service life	L80B10 = 50.000 h
Colour temperature	4000 K
Colour rendering index Ra	> 80
Colour tolerance	SDCM <3
Color Quality Scale	CQS > 80
Photobiological safety	Risk group 1
Energy efficiency class	A++ to A

DATA SHEET

Order description

PDLISB04370840WHCODALI000


Item number

E010306167

GTIN

4015120306167

Scale drawing

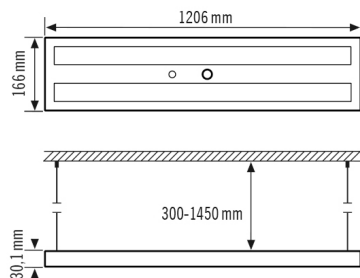

Light distribution

Energy Conservation Solutions Pty Ltd
Exclusive Distributor for ESYLUX in Australia Locations:
VIC/TAS, NSW, QLD, ACT, SA/NT & WA
Phone: **1300 306 136**
For contact details visit: www.ecs.net.au