

DATA SHEET

Order description

PDLPRA040308TWSTODALI00

Item number

EV10125072

GTIN

4015120125072



IP 20

230 V ~

DALI



CQS
80 - 85

CRI
>80

30 W



LED
Tunable white



Product description

- LED design pendant light with prismatic (CRYSTAL) cover (diffuser)
- High-quality pendant light, designed by the design agency, Peter Schmidt
- LED output 30W
- Ballast (DALI) for direct lighting
- 1 LED illuminated area (downlight) for direct lighting
- Colour temperature: approx. 2700K to 6500K (Tunable White)

Technical data

GENERAL	
Conformity	CE, RoHS, WEEE
warranty	5-year
MOUNTING	
Installation type	Pendant
Mounting location	Ceiling
HOUSING	
Dimensions	Length 1200 mm x Width 335 mm x Height/Depth 28 mm
Weight	9000 g
Material	Aluminium
Protection type	IP 20
Permissible ambient temperature	0 °C...+40 °C
Colour	Chrome
Terminal	2,5 mm ² / 1,5 mm ²
Glow wire test in accordance with IEC 60695-2-10	650 °C - 30 s

ELECTRICAL VERSION

Protection class	II
Nominal voltage	110 - 240 V / 50 - 60 Hz

LIGHT

Diffuser	micro-prismatic / transparent
Light emission	direkt
Beam angle	98 °
Unified Glare Rating	≤ 16
Flicker factor	0 %
Rated output	30 W
Luminous Flux (light)	3560 lm
Luminous efficacy	118 lm/W
LED service life	L80B10 = 50.000 h
Colour temperature	2700 K - 6500 K (Tunable White)
Colour rendering index Ra	> 85
Colour tolerance	SDCM <3
Color Quality Scale	CQS > 85
Photobiological safety	Risk group 0
Energy efficiency class	A++ to A

DATA SHEET

Order description

PDLPRA040308TWSTODALI00


Item number

EV10125072


GTIN

4015120125072

Scale drawing



Light distribution

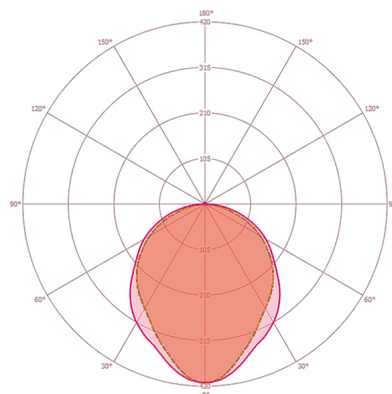

Energy Conservation Solutions Pty Ltd

Exclusive Distributor for ESYLUX in Australia Locations:

VIC/TAS, NSW, QLD, ACT, SA/NT & WA

Phone: **1300 306 136**

For contact details visit: www.ecs.net.au