

## DATA SHEET

### Order description

PDLPRA04030830STPODIM0000

### Item number

EV10125096

### GTIN

4015120125096



IP 20

230 V ~

DALI



CQS  
80 - 85

CRI  
>80

LED  
3000 K

30 W



### Product description

- LED design pendant light with prismatic (CRYSTAL) cover (diffuser)
- High-quality pendant light, designed by the design agency, Peter Schmidt
- LED output 30W
- Integrated ballast (for dimming by double button), installation without further accessories
- 1 LED illuminated area (downlight) for direct lighting
- Colour temperature: approx. 3000 K (warm white)

### Technical data

GENERAL	
Conformity	CE, RoHS, WEEE
warranty	5-year
MOUNTING	
Installation type	Pendant
Mounting location	Ceiling
HOUSING	
Dimensions	Length 1200 mm x Width 335 mm x Height/ Depth 28 mm
Weight	9000 g
Material	Aluminium
Protection type	IP 20
Permissible ambient temperature	0 °C...+40 °C
Colour	Chrome
Terminal	2,5 mm <sup>2</sup> / 1,5 mm <sup>2</sup>
Glow wire test in accordance with IEC 60695-2-10	650 °C - 30 s

### ELECTRICAL VERSION

Protection class	II
Nominal voltage	230 - 230 V / 50 - 60 Hz


### LIGHT

Diffusor	micro-prismatic / transparent
Light emission	direkt
Beam angle	98 °
Unified Glare Rating	≤ 16
Flicker factor	<3 %
Rated output	30 W
Luminous Flux (light)	3300 lm
Luminous efficacy	110 lm/W
LED service life	L80B10 = 50.000 h
Colour temperature	3000 K
Colour rendering index Ra	> 80
Colour tolerance	SDCM <3
Color Quality Scale	CQS > 80
Photobiological safety	Risk group 0
Energy efficiency class	A++ to A


## DATA SHEET

Order description	Item number	GTIN
PDLPRA04030830STPODIM0000	EV10125096	4015120125096

### Scale drawing



### Light distribution

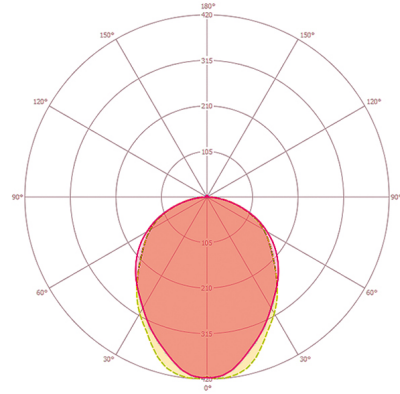

**Energy Conservation Solutions Pty Ltd**

Exclusive Distributor for ESYLUX in Australia Locations:

VIC/TAS, NSW, QLD, ACT, SA/NT & WA

Phone: **1300 306 136**

For contact details visit: [www.ecs.net.au](http://www.ecs.net.au)