

## DATA SHEET

### Order description

FLOPRA011208TWCRCASYBL00

### Item number

EV10401022

### GTIN

4015120401022



### Product description

- High-quality floor lamp, designed by the design agency Peter Schmidt
- Biodynamic light thanks to SymbiLogic technology
- Presence detector for presence-dependent lighting of the work place
- 2 individually controllable LED light panels (up/downlight) for direct illumination and indirect overhead light

### Technical data


GENERAL	
Conformity	CE, RoHS, WEEE
warranty	5-year
MOUNTING	
Installation type	Free standing
Mounting location	Floor
HOUSING	
Dimensions	Length 510 mm x Width 310 mm x Height/Depth 2000 mm
Weight	25000 g
Material	Aluminium
Protection type	IP 20
Permissible ambient temperature	0 °C...+40 °C
Colour	Chrome
ELECTRICAL VERSION	
Protection class	I
Nominal voltage	110 - 240 V / 50 - 60 Hz
Stand-by consumption	< 1 W

LIGHT	
Diffuser	micro-prismatic / transparent
Light emission	direkt/indirekt
Beam angle	95 °
Unified Glare Rating	≤ 16
Flicker factor	0 %
Rated output	110 W
Luminous Flux (light)	11475 lm
Luminous efficacy	104 lm/W
LED service life	L80B10 = 50.000 h
Colour temperature	2700 K - 6500 K (Tunable White)
Colour rendering index Ra	> 85
Colour tolerance	SDCM <3
Color Quality Scale	CQS > 85
Energy efficiency class	A++ to A
SENSORS	
Detection angle	340°
Detection range diagonally	6 m


## DATA SHEET

Order description	Item number	GTIN
FLOPRA011208TWCRCASYBL00	EV10401022	4015120401022

### Scale drawing

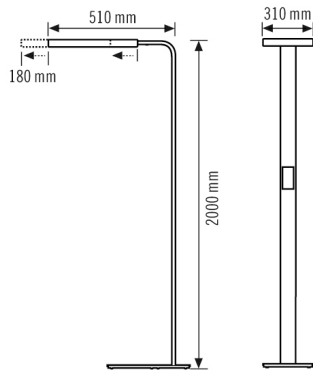


### Field of detection

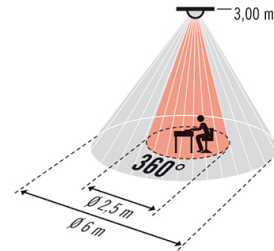

- Operating area approx.  $\varnothing$  2.5 m
- Passage area / diagonally to detector approx.  $\varnothing$  6 m

### Light distribution

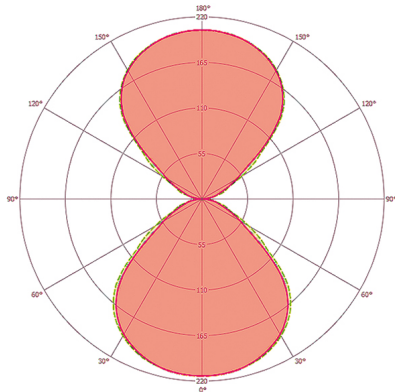

**Energy Conservation Solutions Pty Ltd**

Exclusive Distributor for ESYLUX in Australia Locations:

VIC/TAS, NSW, QLD, ACT, SA/NT & WA

Phone: **1300 306 136**

For contact details visit: [www.ecs.net.au](http://www.ecs.net.au)