

DATA SHEET

Order description


FLOPRA021208TWWHCASYBL00

Item number

EV10401039

GTIN

4015120401039

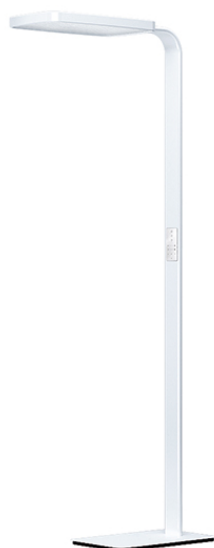

Product description

- High-quality floor lamp, designed by the design agency Peter Schmidt
- Biodynamic light thanks to SymbiLogic technology
- Presence detector for presence-dependent lighting of the work place
- 2 individually controllable LED light panels (up/downlight) for direct illumination and indirect overhead light

Technical data

GENERAL

Conformity	CE, RoHS, WEEE
warranty	5-year

MOUNTING

Installation type	Free standing
Mounting location	Floor

HOUSING

Dimensions	Length 510 mm x Width 310 mm x Height/Depth 2000 mm
Weight	25000 g
Material	Aluminium
Protection type	IP 20
Permissible ambient temperature	0 °C...+40 °C
Colour	white, similar to RAL 9016

ELECTRICAL VERSION

Protection class	I
Nominal voltage	110 - 240 V / 50 - 60 Hz
Stand-by consumption	< 1 W

LIGHT

Diffusor	micro-prismatic / transparent
Light emission	direkt/indirekt
Beam angle	95 °
Unified Glare Rating	≤ 16
Flicker factor	0 %
Rated output	110 W
Luminous Flux (light)	11475 lm
Luminous efficacy	104 lm/W
LED service life	L80B10 = 50.000 h
Colour temperature	2700 K - 6500 K (Tunable White)
Colour rendering index Ra	> 85
Colour tolerance	SDCM <3
Color Quality Scale	CQS > 85
Energy efficiency class	A++ to A

SENSORS

Detection angle	340°
Detection range diagonally	6 m

DATA SHEET

Order description

FLOPRA021208TWWHCASYBL00


Item number

EV10401039


GTIN

4015120401039

Scale drawing

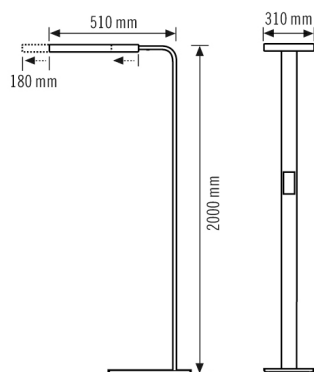


Field of detection



Operating area approx. $\varnothing$ 2.5 m

Passage area / diagonally to detector approx. $\varnothing$ 6 m

Light distribution

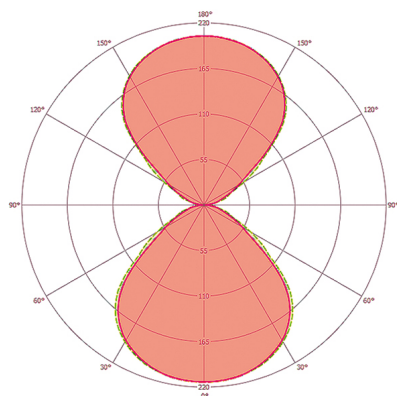

Energy Conservation Solutions Pty Ltd

Exclusive Distributor for ESYLUX in Australia Locations:

VIC/TAS, NSW, QLD, ACT, SA/NT & WA

Phone: **1300 306 136**

For contact details visit: www.ecs.net.au