



## KANOLED

### SERVICE STATION LUMINAIRE

**KANOLED LED** luminaires are a reliable lighting solution suitable for service station. With an IP65 protective housing, the **KANOLED LED** luminaire offers a long useful life, maximum energy savings (when compared to traditional solutions) and is easy to install and maintain..







## Features

- Aluminium injection powder coated housing
- Transparent glass diffuser
- IP65
- Surface mounted
- Power LED
- Efficiency
  - up to 103.6 lm/W
- LED life @ L70
  - 50,000 hours @ Ta = 45°C
- Operating temperature range
  - - 20°C to + 45°C
- Impact resistance
  - IK 07
- Optic
  - narrow angle reflector
- Installation
  - under the canopy

## PHOTOMETRIC CURVES

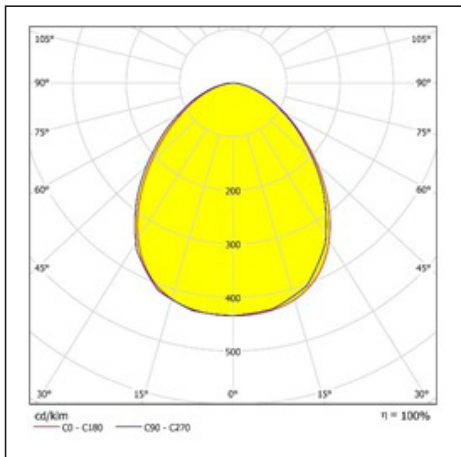

## TECHNICAL DRAWINGS

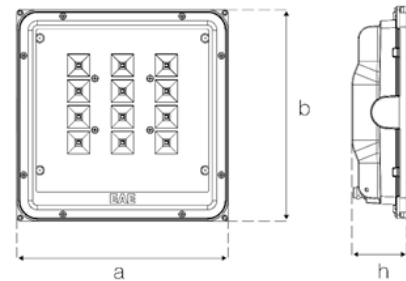

| Type        | a   | b   | h  |
|-------------|-----|-----|----|
| KANOLED 337 | 337 | 336 | 88 |

## PURCHASE ORDER TABLE

| Part Number | CCT   | CRI | LUMENS | WATTAGE | EFFICIENCY (LM/W) | 50000H @ L70 |
|-------------|-------|-----|--------|---------|-------------------|--------------|
| 3073130     | 5700K | >65 | 5772   | 55.8    | 103.6             | Ta = 45      |
| 3073121     | 5700K | >65 | 7761   | 76.5    | 101.5             | Ta = 45      |
| 3073124     | 5700K | >65 | 9910   | 105     | 94.3              | Ta = 45      |