



Order Code : 3084202
Product Code : ARS 058D 400D00 4K31

ARES

58W LED Urban Luminaire



Product Data

Standard Features

Housing	: Aluminum injection
Diffuser	: Glare controlled opal diffuser
IP Grade	: IP 65
Installation	: Pole mounted
Light Source	: Mid Power LED


Optical & Electrical Features

Power Consumption	: 57.8W
Final Luminous Flux	: 4312.7 lm
Efficacy	: 74.5 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Drive Current	: 700mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >80

Other Features & Conditions

LED Life Time - L70 : 36.000 hours @ Ta=25 °C

Photometric Curve

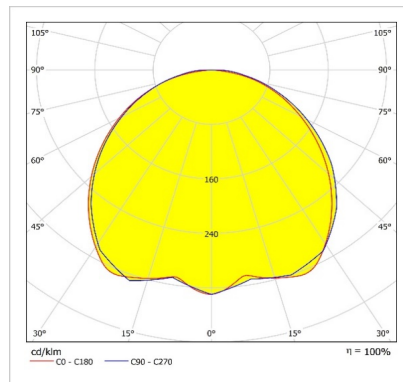


Optional Features

Correlated Color Temperatures	: 3000K, 6500K
Emergency Kit Options	: No
DALI Option	: No

ARES

58W LED Urban Luminaire

3084202 ARS 058D 40OD00 4K31

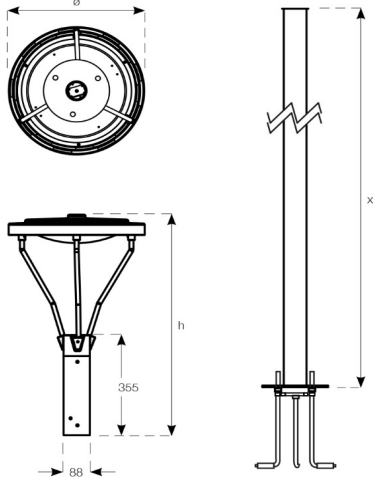

Dimension (mm)

	ø	h	x
Standard	454	779	300, 400, 500

Weight (kg)

Standard	10,2
----------	------



Pole Order Table

Order Code	Descriptions	Product Codes
1012739	ARES 3m. Pole	ARES CAP76 3M DIREK
1012740	ARES 4m. Pole	ARES CAP76 4M DIREK
1012741	ARES 5m. Pole	ARES CAP76 5M DIREK

- EAE, reserves the right to make changes without prior notice.



EAE Aydınlatma A.Ş.

İkitelli Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90
www.eaeaydinlatma.com.tr

Revision date: 03.10.2016