



ROTANO V.3

24 W LED Luminaire For Street Lighting



Order Code : 3112402
Product Code : RTN 024D 57CM00 WL 2K48 V3

Product Data

Standard Features

Housing	: Aluminium injection monoblock
Optic	: Wide angle optic lens
IP Grade	: IP 66
Illuminance Class	: Parks and gardens
Light Source	: Power LED


Optical & Electrical Features

Power Consumption	: 23.5 W
Final Luminous Flux	: 2480.9 lm
Efficacy	: 105.3 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: Cos ϕ > 0,9
Surge Transient Protection	: 6 kV
Drive Current	: 700 mA
Correlated Color Temperature	: 5700K
Color Rendering Index	: >70

Other Features & Conditions

Operating Temperature Range	: -20C°/+40 C°
Impact Resistance	: IK09
Led Life Time - L70	: > 60.500 hours @ Ta=40 C°

Photometric Curve

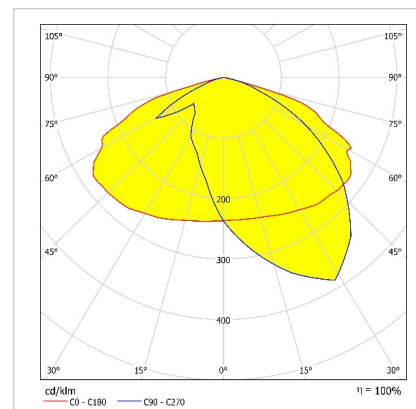


Optional Features

Correlated Color Temperatures	: 3000K, 4000K, 5000K, 6500K
Dali Options	: Yes

ROTANO V.3

24 W LED Luminaire For Street Lighting

3112402 RTN 024D 57CM00 WL 2K48 V3

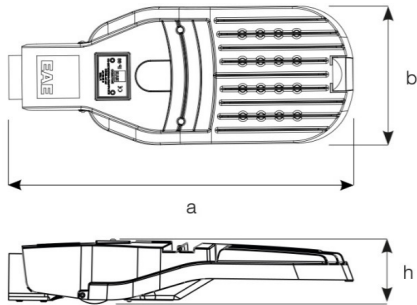

Dimensions (mm)


a	b	h
570	225	98

Weight (kg)


5,3




Vertical Installation Brackets

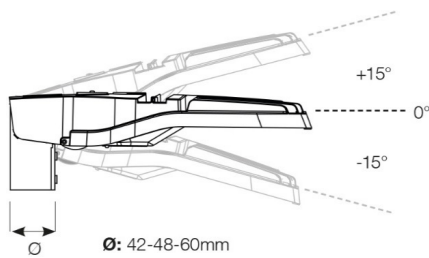

Horizontal Installation Brackets

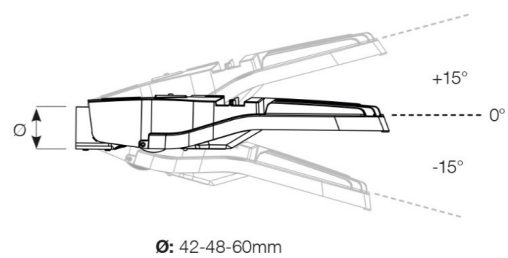

Vertical or Horizontal Application With Same Brackets

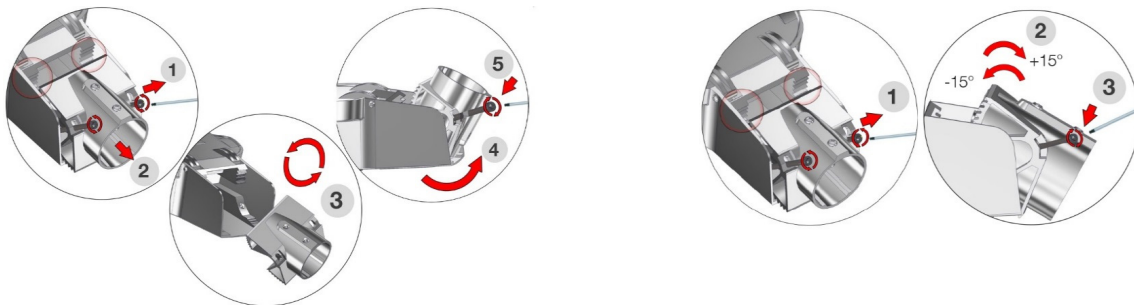

Energy Conservation Solutions Pty Ltd

Exclusive Distributor for EAE Lighting in Australia
Locations: VIC/TAS, NSW, QLD, ACT, SA/NT & WA

Phone: 1300 306 136

For contact details visit: www.ecs.net.au