



PROLIT KOMPAKT V.2

68 W Front and Area LED Lighting Luminaire

Order Code : 3137351
Product Code : PRK 068Z 40CM00 54 7K92 V.2

Product Data

Standard Features

Housing	: Aluminium injection housing
Diffuser	: Tempered sanded glass
Optic	: 54° lens
IP Grade	: IP66
Installation	: Floor Mounted
Light Source	: Power LED

Optical & Electrical Features


Power Consumption	: 68.2 W
Final Luminous Flux	: 7922.3 lm
Efficacy	: 116.1 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Surge Transient Protection	: 3,5 kV
Drive Current	: 1050 mA
Correlated Color Temperature	: 4000K
Color Rendering Index	: >70

Other Features & Conditions

Operating Temperature Range	: -20 °C/+50 °C
Impact Resistance	: IK10
Led Life Time - L70	: > 60.500 hours @Ta= 50 °C



Photometric Curve

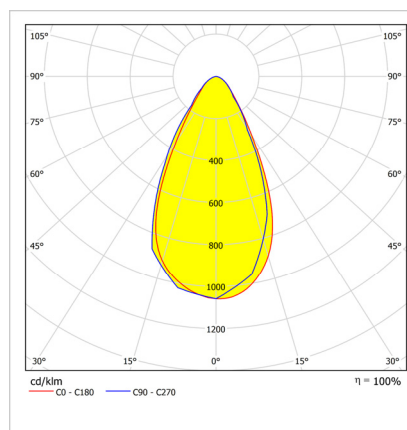


Optional Features

Correlated Color Temperatures	: 3000K, 5700K, 6500K
Dali	: Yes

PROLIT KOMPAKT V.2

68 W Front and Area LED Lighting Luminaire

3137351 PRK 068Z 40CM00 54 7K92 V.2

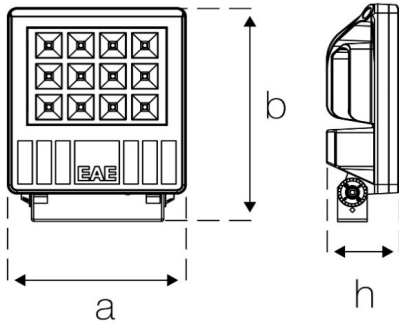


Dimensions (mm)

	a	b	h
Standard	246	305	96

Weight (kg)

Standard	4,9
----------	-----

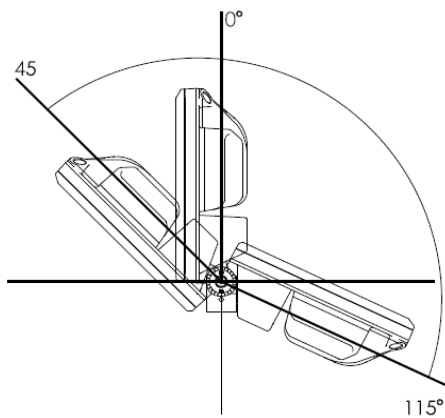

Energy Conservation Solutions Pty Ltd

Exclusive Distributor for **EAE Lighting** in Australia
Locations: VIC/TAS, NSW, QLD, ACT, SA/NT & WA

Phone: **1300 306 136**

For contact details visit: www.ecs.net.au