



# GPRONA

484 W Front and Area LED Lighting Luminaires

Order Code : 3139544  
Product Code : GPR 484Z 50CM00 AS 73K0



## Product Data


### Standard Features

Housing	: SW 306G painted aluminium injection housing
Diffuser	: Tempered transparent glass
Optic	: Asymmetric reflector
IP Grade	: IP66
Installation	: Floor, wall, pole mounted
Light Source	: Mid Power Led

### Optical & Electrical Features

Power Consumption	: 483.9 W
Final Luminous Flux	: 73059.9 lm
Efficacy	: 150.9 lm/W
Input Voltage	: 220-240 V AC
Frequency	: 50-60 Hz
Power Factor	: > 0,9
Correlated Color Temperature	: 5000K
Color Rendering Index	: >80

## Photometric Curve

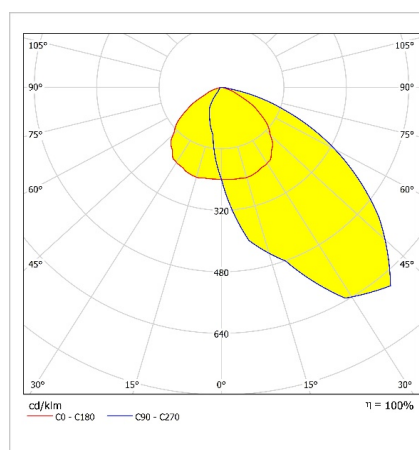

### Other Features & Conditions

Operating Temperature Range	: -40 °C/+45 °C
Impact Resistance	: IK09
Led Life Time - L70	: > 60.000 hours @Ta= 45 °C


### Optional Features

Correlated Color Temperatures	: 4000K
-------------------------------	---------

## GPRONA

484 W Front and Area LED Lighting Luminaires

3139544 GPR 484Z 50CM00 AS 73K0

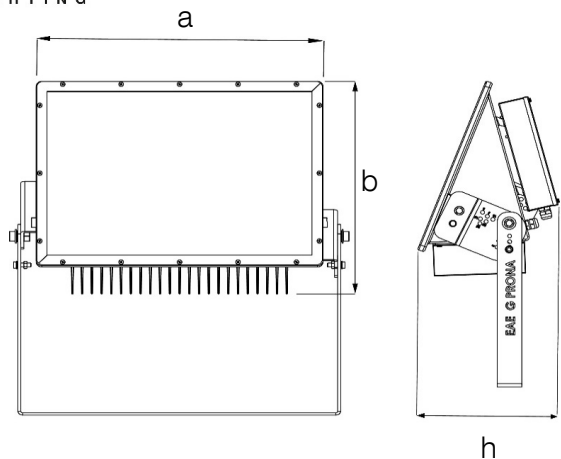

### Dimensions (mm)


	a	b	h
Standard	586	410	235

### Weight (kg)

Standard	20,7
----------	------




### Suspension Set

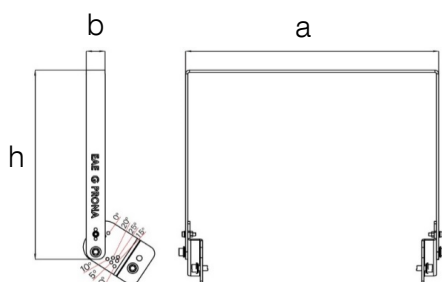

#### Tall Hanger Set

Ordering Code : 3116720


a	b	h
662mm	50mm	506mm

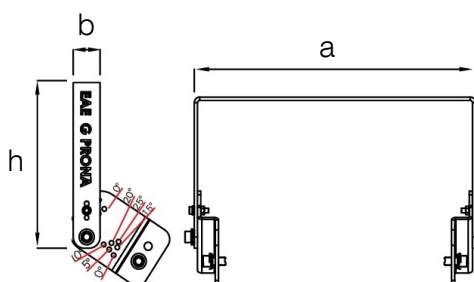

#### Short Hanger Set

Ordering Code : 3117816

a	b	h
662mm	50mm	306mm

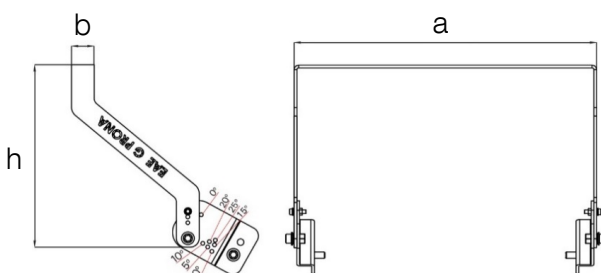


#### Angled Hanger Set

Ordering Code : 3114842

a	b	h
662mm	50mm	406mm

### Hanger Set Bore Diameter Measures

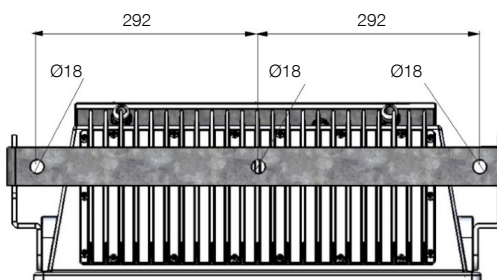

- EAE, reserves the right to make changes without prior notice.

**engineering the light**

EAE Aydınlatma A.Ş.

İktisadi Organize Sanayi Bölgesi Eski Turgut Özal Caddesi No:20 Başakşehir / İSTANBUL-TURKEY Phone: +90 212 413 21 00 (pbx) Fax: +90 212 549 37 90  
www.eaeaydinlatma.com.tr

Revision date: 07.12.2018

**Energy Conservation Solutions Pty Ltd**

Exclusive Distributor for EAE Lighting in Australia  
Locations: VIC/TAS, NSW, QLD, ACT, SA/NT & WA

Phone: 1300 306 136

For contact details visit: [www.ecs.net.au](http://www.ecs.net.au)