

DATA SHEET

ALVA 360° 540 / 170 16W 3K ANTH. CLEAR DALI

Order description	Item number	GTIN
BL-ALV 40 018 830ANT DALI	EL10820113	4015120820113

IP 54	IP 65	230 V ~	DALI	IK 09		ON/OFF	CRI >80	LED 3000 K	16 W	
-------	-------	---------	------	-------	---	--------	---------	------------	------	---



Product description

- LED DALI bollard light made from high-grade aluminium
- Dirt-repellent thanks to powder coating with lotus effect
- Integrated ballast (DALI), installation without further accessories
- High-quality housing, die-cast aluminium, charcoal grey powder-coated, similar to RAL 7016
- Colour temperature 3000 K

Technical data

GENERAL	
Conformity	CE, RoHS, WEEE
warranty	5-year
MOUNTING	
Installation type	Free standing
Installation position	Floor
HOUSING	
Dimensions	Height/Depth 540 mm, Ø 170 mm
Weight	5500 g
Housing material	powder-coated aluminium
Protection type	IP 65 (lamp head) IP 54 (connection box)
Permissible ambient temperature	-25 °C...+40 °C
Impact resistance	IK09
Colour	anthracite grey, similar to RAL 7016
Terminal	2,5 mm ² / 1,5 mm ²

ELECTRICAL VERSION

Protection class	I
Nominal voltage	230 - 230 V / 50 Hz

LIGHT

Diffusor	transparent
Light emission	Direct
Beam angle	159 °
Flicker factor	<10 %
Rated output	16,0 W
Luminous Flux (light)	1030 lm
Luminous efficacy	64 lm/W
LED service life	L80B10 = 50.000 h
Colour temperature	3000 K
Colour rendering index Ra	> 80
Colour tolerance	SDCM <3
Color Quality Scale	80
Energy efficiency class	A++ to A

Accessories


Product designation	Item number	GTIN
ALVA ground anchor operating instructions	EL10820083	4015120820083

DATA SHEET


ALVA 360° 540 / 170 16W 3K ANTH. CLEAR DALI

Order description	Item number	GTIN
BL-ALV 40 018 830ANT DALI	EL10820113	4015120820113

Scale drawing



Light distribution

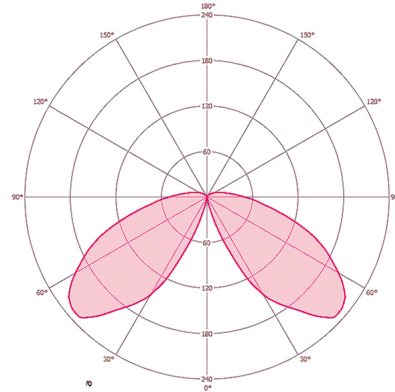

Energy Conservation Solutions Pty Ltd
Exclusive Distributor for ESYLUX in Australia Locations:
VIC/TAS, NSW, QLD, ACT, SA/NT & WA
Phone: **1300 306 136**
For contact details visit: www.ecs.net.au