

DATA SHEET

MD 180 Basic L

Order description



MD 180 Basic L

Item number

EM10055515

GTIN

4015120055515

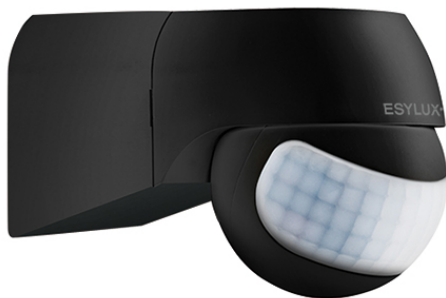

Product description

- Motion detector with 180° field of detection for convenient light switching
- Sensing and range adjustment due to revolving and tilting spherical head technology
- Large wiring area

Technical data

GENERAL	
Conformity	CE, RoHS, WEEE
warranty	3-year
MOUNTING	
Installation type	Surface mounting
Installation position	Wall
HOUSING	
Dimensions	length 102 mm x width 55 mm x Height/Depth 66 mm
Weight	190 g
Housing material	UV-stabilised polycarbonate
Protection type	IP 44
Permissible ambient temperature	-20 °C...+40 °C
Relative humidity	5 - 95 %, non-condensing
Colour	Black
Terminal	2,5 mm ² / 1,5 mm ²
ELECTRICAL VERSION	
Protection class	II
Nominal voltage	230 - 230 V / 50 Hz
Stand-by consumption	< 0.5 W
SENSORS	
Power consumption	0,5 W
Detection angle	180° horizontally and vertically rotatable +/- 30°
Detection range diagonally	20 m

Detection range head-on	5 m
Field of detection	157 m ²
Range adjustment	Mechanical
Recommended installation height	2,5 m
Max. mounting height	3 m
Light measurement	mixed light
Level of brightness	3 - 1000 lx
Number of light channels	1
Number of switching contacts	0
Slave input	No
Number of parallel switchable detectors	6
Fully automatic	yes
Semi-automatic	No
constant lighting control	false
Switching delay from "dark to light" [s]	0 s
Switching delay from "light to dark" [s]	0 s
CONTROL	
Channel 1	Lighting
Interface	Switching
Contact	make contact/non-floating
Switching capacity channel 1	230 V AC/50 Hz 1000 W/5 A (cos phi = 1), 500 VA/2.5 A (cos phi = 0.5)
In-rush current	40 A / 20 ms
Switch-off delay channel 1	10 s - 15 min
Master/slave function	false
constant lighting control	false
Manual override	No

DATA SHEET


MD 180 Basic L

Order description	Item number	GTIN
MD 180 Basic L	EM10055515	4015120055515


Accessories

Product designation	Item number	GTIN
ILR-230V current-limiting module	EP10426353	4015120426353
SRM-230V relay module	EP10426346	4015120426346

Scale drawing

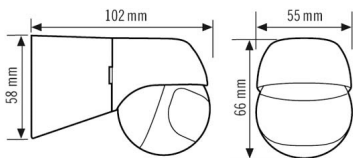


Field of detection



- * Head-on to detector
- Passage area/diagonally to detector

Circuit diagram



Standard operation

Energy Conservation Solutions Pty Ltd
 Exclusive Distributor for ESYLUX in Australia Locations:
 VIC/TAS, NSW, QLD, ACT, SA/NT & WA
 Phone: **1300 306 136**
 For contact details visit: www.ecs.net.au