

DATA SHEET

PD-C 360i/24 DIM

Order description


PD-C 360i/24 DIM white

Item number

EP10426704

GTIN

4015120426704

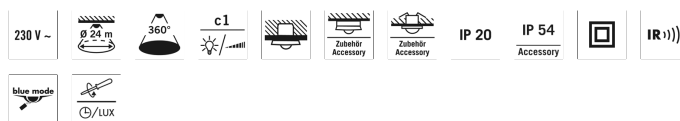

Product description

- Presence detector with 360° field of detection for ceiling mounting
- range of up to 24 m in diameter at a recommended installation height of 3 m (maximum mounting height 5 m)
- Automatic light control to a constant brightness level depending on presence and natural light (1 - 10 V DC interface)
- 16 A high-performance relay (tungsten pre-contact)
- Default settings ensure immediate operability

Technical data

GENERAL	
Conformity	CE, RoHS, WEEE
warranty	5-year
MOUNTING	
Installation type	Recessed mounting
Installation position	Ceiling
Installation dimension	Installation depth 24 mm, Ø 60 mm
HOUSING	
Dimensions	Height/Depth 46 mm, Ø 108 mm
Weight	145 g
Housing material	UV-stabilised polycarbonate
Protection type	recessed-mounted IP 20, IP 54 with surface-mounted box (order separately), IP 20 as recessed ceiling-mounted version (order installation set separately)
Permissible ambient temperature	-25 °C...+50 °C
Relative humidity	5 - 93 %, non-condensing
Colour	white, similar to RAL 9010
Terminal	2,5 mm ² / 1,5 mm ²
ELECTRICAL VERSION	
Protection class	II
Nominal voltage	230 - 230 V / 50 Hz
SENSORS	
Power consumption	0,3 W

Detection angle	360°
Detection range diagonally	24 m
Detection range head-on	11 m
Presence detection range	8 m
Field of detection	453 m ²
Recommended installation height	3 m
Max. mounting height	10 m
Light measurement	mixed light
Level of brightness	5 - 2000 lx
Number of light channels	1
Number of switching contacts	0
Slave input	yes
Max. number of slave detectors	10
Fully automatic	yes
Semi-automatic	yes
Impulse feature	yes
constant lighting control	true
Switching delay from "dark to light" [s]	300 s
Switching delay from "light to dark" [s]	30 s
CONTROL	
Channel 1	Lighting
Interface	Switching/Dimming
Contact	make contact/non-floating
Switching capacity channel 1	230 V AC 50 Hz, 16 A relay, 2300 W/10 A (cos phi = 1), 1150 VA/5 A (cos phi = 0.5)
In-rush current	800 A / 200 µs
Control output	1 - 10 V DC / 50 mA

DATA SHEET

PD-C 360i/24 DIM

Order description	Item number	GTIN
PD-C 360i/24 DIM white	EP10426704	4015120426704


Switch-off delay channel 1	60 s - 30 min
Orientation light	10 % luminous efficiency
Switch-off delay time, orientation light	approx. 1 min.-60 min.
Control output	1 - 10 V DC / 50 mA
Orientation light	10 % luminous efficiency

Switch-off delay time, orientation light	approx. 1 min.-60 min.
Master/slave function	true
constant lighting control	true
Manual override	yes


Accessories

Product designation	Item number	GTIN
PD-C 360/8 Slave	EP10055379	4015120055379
PD-C 360/24 Slave	EP10055386	4015120055386
PD-C 360i/32 Slave	EP10427770	4015120427770
ESY-Pen	EP10425356	4015120425356
Mobil-PDi/plus	EM10425530	4015120425530
Mobil-PDi/user	EM10425547	4015120425547
Mobil-PDi/MDi-universal	EP10433993	4015120433993
Surface-mounted box-C IP 20	EP10425370	4015120425370
Surface-mounted box C IP 54	EP10425905	4015120425905
Cover set C360/24	EP10425431	4015120425431
Ceiling-mounted set-C	EP10425929	4015120425929
Basket guard 165/70	EM10425615	4015120425615
Basket guard 180/90	EM10425608	4015120425608
RC filter/snubber	EP10426988	4015120426988
ALMA 300 IP65 16W 3000K MILKY AUTO ON/OFF	EO10850301	4015120850301

Scale drawing



Field of detection



- Operating area approx. Ø 8 m
- Head-on to detector approx. Ø 11 m
- Passage area / diagonally to detector approx. Ø 24 m

DATA SHEET

PD-C 360i/24 DIM

Order description

PD-C 360i/24 DIM white


Item number

EP10426704

GTIN


4015120426704

Circuit diagram




Standard operation

Circuit diagram



Standard operation with additional control by means of a closing button. If required, the light can be manually switched on or off with the button.

Circuit diagram

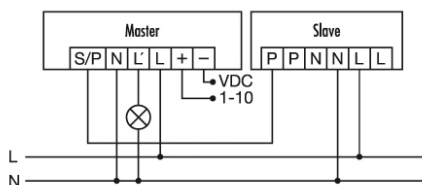

Master/slave connection:

The master device controls connected systems according to the programmed settings.
The sole purpose of the slave devices is to register presence and transmit an impulse to the master device when movement is detected.

Caution: a maximum of 10 slave devices may be connected to one master device.

Energy Conservation Solutions Pty Ltd

Exclusive Distributor for ESYLUX in Australia Locations:

VIC/TAS, NSW, QLD, ACT, SA/NT & WA

Phone: 1300 306 136

For contact details visit: www.ecs.net.au