

DATA SHEET

PD-FLAT 360i/8 SQUARE WHITE KNX

Order description

PD-FLAT 360i/8 SW KNX

Item number

EP10451713

GTIN

4015120451713



Product description

- KNX Design recessed ceiling-mounted presence detector with 360° field of detection
- Range of approx. 8 m in Ø at a recommended installation height of 3 m (maximum mounting height 5 m)
- For use in KNX (EIB), TP (twisted pair) bus system in conjunction with other KNX components
- Parameter and function settings via ETS (Engineering Tool Software)
- Low profile design with plastic design covers: square, white - variably interchangeable

Technical data

GENERAL	
Conformity	CE, RoHS, WEEE
warranty	5-year
MOUNTING	
Installation type	Recessed mounting
Installation position	Ceiling
Installation dimension	Installation depth 24 mm, Ø 45 mm
HOUSING	
Dimensions	length 77 mm x width 77 mm x Height/Depth 6 mm
Weight	103 g
Housing material	UV-stabilised polycarbonate
Protection type	IP 20
Permissible ambient temperature	5 °C...+35 °C
Relative humidity	5 - 93 %, non-condensing
Colour	white, similar to RAL 9010
Terminal	WAGO
ELECTRICAL VERSION	
Protection class	III
Nominal voltage	29 - 31 V
SENSORS	
Power consumption	0,2 W
Power consumption	6 mA
Detection angle	360°

Detection range diagonally	8 m
Detection range head-on	6 m
Presence detection range	4 m
Field of detection	50 m²
Recommended installation height	3 m
Max. mounting height	5 m
Light measurement	mixed light
Level of brightness	3 - 1000 lx
Number of light channels	2
Number of switching contacts	2
Slave input	Yes, unit can be configured as a master or slave device
Fully automatic	yes
Semi-automatic	yes
constant lighting control	true
Switching delay from "dark to light" [s]	300 s
Switching delay from "light to dark" [s]	30 s

CONTROL	
Channel 1	Lighting
Interface	Switching/Dimming
Contact	Bus system
Orientation light	disabled/10 - 50 %, 2 values can be selected
Switch-off delay time, orientation light	only in controlling modus: continuous lighting/1 min - 250 min
Output	Presence
Turn-on delay	disabled/2 min - 30 min
Orientation light	disabled/10 - 50 %, 2 values can be selected

DATA SHEET

PD-FLAT 360i/8 SQUARE WHITE KNX

Order description	Item number	GTIN
PD-FLAT 360i/8 SW KNX	EP10451713	4015120451713


Switch-off delay time, orientation light	only in controlling modus: continuous lighting/1 min - 250 min
Bus voltage	29-31 V = (KNX)
KNX input	manual light control, block objects, reset, slave
KNX output	presence, status, light value, HVAC
Sensitivity configurable via ETS	yes
Sends a telegram at regular intervals	yes

Master/slave function	true
constant lighting control	true
Presence simulation	true
Manual override	yes
Night-light feature	yes
Light channel	c1 + c2 switching/dimming, offset (-50 % to +50 %)


Accessories

Product designation	Item number	GTIN
ESY-Pen	EP10425356	4015120425356
Mobil-PDi/user	EM10425547	4015120425547
Mobil-PDi/MDi-universal	EP10433993	4015120433993
Recessed ceiling mounting kit for FLAT series	EP10426889	4015120426889
Basket guard 165/70	EM10425615	4015120425615
CA-C Telescope Magnet	EC10430022	4015120430022
Cover FLAT series ROUND WHITE cover	EP00007231	4015120007231
Cover FLAT series GLASS ROUND WHITE cover	EP00007255	4015120007255
Cover FLAT series GLASS SQUARE WHITE cover	EP00007262	4015120007262

Scale drawing



Field of detection




- Operating area approx. Ø 4 m
- Head-on to detector approx. Ø 6 m
- Passage area / diagonally to detector approx. Ø 8 m

DATA SHEET

PD-FLAT 360i/8 SQUARE WHITE KNX

Order description	Item number	GTIN
PD-FLAT 360i/8 SW KNX	EP10451713	4015120451713

Circuit diagram

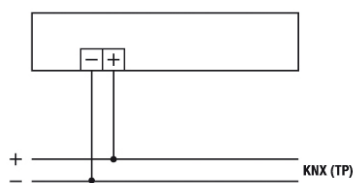

Standard operation