

DATA SHEET

STELLA 600 33W 4000K PRISMATIC DALI

| Order description | Item number | GTIN |
|---------------------------|-------------|---------------|
| PNLSTE10033840WHP0DALI000 | EQ10600234 | 4015120600234 |



Product description

- LED light with prismatic (PRISMATIC) cover (diffuser)
- Can be used as a panel light in ceiling systems with concealed or visible mounting rails for system dimensions 600 mm x 600 mm
- LED output 33 W
- Integrated ballast (DALI), installation without further accessories
- Colour temperature approx. 4000 K (neutral white)

Technical data

| GENERAL | |
|---------------------------------|--|
| Special product features | DALI |
| Conformity | CE, RoHS, WEEE |
| warranty | 5-year |
| MOUNTING | |
| Installation type | Recessed mounting |
| Mounting location | Ceiling |
| Installation dimension | Installation length 595 mm x Installation width 595 mm x |
| HOUSING | |
| Dimensions | Length 600 mm x Width 600 mm x Height/Depth 9 mm |
| Weight | 3500 g |
| Material | painted aluminium |
| Surface finish | frosted |
| Protection type | IP 20 |
| Permissible ambient temperature | 0 °C...+50 °C |
| Colour | white, similar to RAL 9003 |
| Terminal | 1.5 mm ² |

| | |
|--|---------------|
| Glow wire test in accordance with IEC 60695-2-10 | 650 °C - 30 s |
|--|---------------|

ELECTRICAL VERSION

| | |
|------------------|--------------------------|
| Protection class | II |
| Nominal voltage | 110 - 240 V / 50 - 60 Hz |

LIGHT

| | |
|---------------------------|------------------------|
| Diffusor | micro-prismatic / opal |
| Light emission | direkt |
| Beam angle | 116 ° |
| Unified Glare Rating | ≤ 19 |
| Flicker factor | <3% |
| Rated output | 33 W |
| Luminous Flux (light) | 3800 lm |
| Luminous efficacy | 115 lm/W |
| LED service life | L80B50 = 50.000 h |
| Colour temperature | 4000 K |
| Colour rendering index Ra | > 80 |
| Colour tolerance | SDCM <3 |
| Color Quality Scale | >80 |
| Photobiological safety | Risk group 0 |
| Energy efficiency class | A++ to A |

DATA SHEET


STELLA 600 33W 4000K PRISMATIC DALI

| Order description | Item number | GTIN |
|---------------------------|-------------|---------------|
| PNLSTE10033840WHP0DALI000 | EQ10600234 | 4015120600234 |


Accessories

| Product designation | Item number | GTIN |
|--|-------------|---------------|
| PNL STELLA 1200mm Pendulum set | EQ10600159 | 4015120600159 |
| PNL STELLA 1000mm Pendulum set | EQ10600166 | 4015120600166 |
| PNL STELLA 600 mounting frame SM WH SLIM | EQ10600173 | 4015120600173 |
| PNL 600 UMF FM WH | EQ10113086 | 4015120113086 |
| PNL drop protection | EQ10121616 | 4015120121616 |

Scale drawing

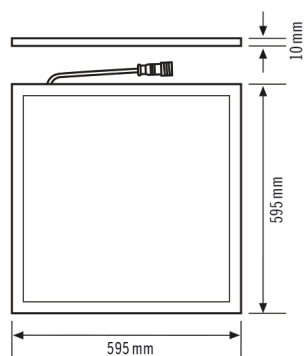

Light distribution

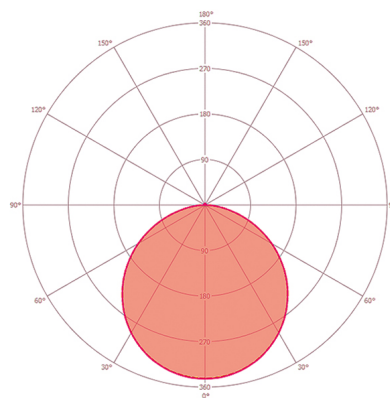

Energy Conservation Solutions Pty Ltd

Exclusive Distributor for ESYLUX in Australia Locations:

VIC/TAS, NSW, QLD, ACT, SA/NT & WA

Phone: **1300 306 136**

For contact details visit: www.ecs.net.au