

DATA SHEET

House number ALVA 15 W 4000K AN MILKY AUTO

Order description

WHL-ALV 22 015 840 AN A

Item number

EL10840227

GTIN

4015120840227



Product description

- High-quality aluminium LED automatic house number light
- Dirt-repellent thanks to powder coating with lotus effect
- Motion detectors and switch input for switching operating states

Technical data

GENERAL	
Conformity	CE, RoHS, WEEE
warranty	5-year
MOUNTING	
Installation type	Surface mounting
Mounting location	Ceiling / Wall
HOUSING	
Dimensions	Length 250 mm x Width 200 mm x Height/Depth 75 mm
Weight	1650 g
Material	powder-coated aluminium
Protection type	IP 65
Permissible ambient temperature	-25 °C...+40 °C
Impact resistance	IK09
Colour	anthracite grey, similar to RAL 7016
Terminal	2,5 mm ² / 1,5 mm ²
Glow wire test in accordance with IEC 60695-2-10	650 °C - 30 s
ELECTRICAL VERSION	

Protection class	I
Nominal voltage	230 - 230 V / 50 Hz
LIGHT	
Diffusor	opal
Light emission	direkt
Beam angle	120 °
Flicker factor	<10 %
Rated output	15 W
Luminous Flux (light)	1005 lm
Luminous efficacy	67 lm/W
LED service life	L80B10 = 50.000 h
Colour temperature	4000 K
Colour rendering index Ra	> 80
Colour tolerance	SDCM <3
Color Quality Scale	80
Energy efficiency class	A++ to A
SENSORS	
Power consumption	90 mA
Detection range diagonally	8 m

DATA SHEET


House number ALVA 15 W 4000K AN MILKY AUTO

Order description	Item number	GTIN
WHL-ALV 22 015 840 AN A	EL10840227	4015120840227


Accessories

Product designation	Item number	GTIN
Number set 1-999, a-f	EL10017230	4015120017230
Mobil-PDi/plus	EM10425530	4015120425530
Mobil-PDi/MDi-universal	EP10433993	4015120433993
ESY-Pen	EP10425356	4015120425356

Scale drawing




Field of detection



■ Passage area / diagonally to detector

Light distribution

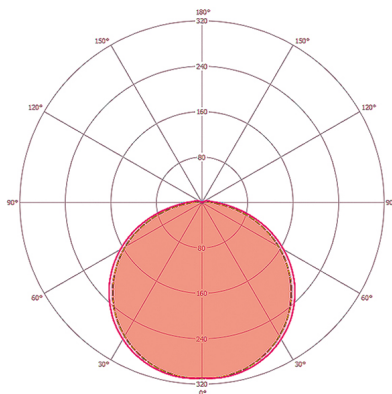

Energy Conservation Solutions Pty Ltd
 Exclusive Distributor for ESYLUX in Australia Locations:
 VIC/TAS, NSW, QLD, ACT, SA/NT & WA
 Phone: **1300 306 136**
 For contact details visit: www.ecs.net.au