

## DATA SHEET

### Order description

PD-C360i/8 KNX UP

### Item number

EP10427404

### GTIN

4015120427404



### Product description

- KNX recessed ceiling-mounted presence detector with 360° field of detection
- Range of up to 8 m in diameter at a recommended installation height of 3 m (maximum mounting height 5 m)
- For use in KNX (EIB), TP (twisted pair) bus system in conjunction with other KNX components
- Parameter and function settings via ETS (Engineering Tool Software)

### Technical data

GENERAL	
Conformity	CE, RoHS, WEEE
warranty	5-year
MOUNTING	
Installation type	Recessed mounting
Mounting location	Ceiling
Installation dimension	Installation depth 24 mm, Ø 60 mm
HOUSING	
Dimensions	Height/Depth 38 mm, Ø 108 mm
Weight	120 g
Material	UV-stabilised polycarbonate
Protection type	IP 20
Permissible ambient temperature	5 °C...+50 °C
Relative humidity	5 - 93 %, non-condensing
Colour	white, similar to RAL 9010
Terminal	WAGO
ELECTRICAL VERSION	
Protection class	III
Nominal voltage	29 - 31 V
SENSORS	
Power consumption	0,2 W
Power consumption	6 mA
Detection angle	360°
Detection range diagonally	8 m
Detection range head-on	6 m

Detection range zone de présence	4 m
Field of detection	50 m <sup>2</sup>
Recommended installation height	3 m
Max. mounting height	5 m
Light measurement	mixed light
Level of brightness	5 - 2000 lx
Number of light channels	2
Number of switching contacts	0
Slave input	Yes, unit can be configured as a master or slave device
Fully automatic	yes
Semi-automatic	yes
Constant lighting control	true
Switching delay from "dark to light" [s]	300 s
Switching delay from "light to dark" [s]	30 s

CONTROL	
Channel 1	Lighting
Interface	Switching/Dimming
Contact	Bus system
Orientation light	disabled/10 - 50 %, 2 values can be selected
Switch-off delay time, orientation light	only in controlling modus: continuous lighting/1 min - 250 min
Turn-on delay	disabled/2 min - 30 min
Orientation light	disabled/10 - 50 %, 2 values can be selected
Switch-off delay time, orientation light	only in controlling modus: continuous lighting/1 min - 250 min
Switch-on delay channel 3	disabled/2 min - 30 min
Time setting channel 3	disabled/30 sec./1 min./12 hrs

## DATA SHEET


Order description	Item number	GTIN
PD-C360i/8 KNX UP	EP10427404	4015120427404
Bus voltage	29-31 V = (KNX)	
KNX input	manual light control, block objects, reset, slave	
KNX output	presence, status, light value, HVAC	
Sensitivity configurable via ETS	yes	
Sends a telegram at regular intervals	yes	
Master/slave function	true	

Constant lighting control	true
Presence simulation	true
Manual override	yes
Night-light feature	yes
Light channel	c1 + c2 switching/dimming, offset (-50 % to +50 %)


### Accessories

Product designation	Item number	GTIN
ESY-Pen	EP10425356	4015120425356
Mobil-PDi/user	EM10425547	4015120425547
Mobil-PDi/MDi-universal	EP10433993	4015120433993
Surface-mounted box-C IP 20	EP10425370	4015120425370
Surface-mounted box C IP 54	EP10425905	4015120425905
Cover set-C360/8	EP10425936	4015120425936
Ceiling-mounted set-C	EP10425929	4015120425929
Basket guard 180/90	EM10425608	4015120425608
Basket guard 165/70	EM10425615	4015120425615
Mobil-PDi/MDi	EM10425509	4015120425509

### Scale drawing

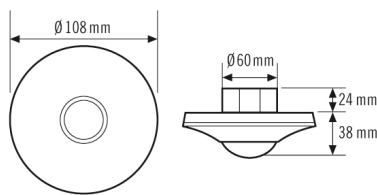

### Field of detection




- Operating area approx.  $\varnothing$  4 m
- Head-on to detector approx.  $\varnothing$  6 m
- Passage area / diagonally to detector approx.  $\varnothing$  8 m

## DATA SHEET

Order description	Item number	GTIN
PD-C360i/8 KNX UP	EP10427404	4015120427404

### Circuit diagram

---

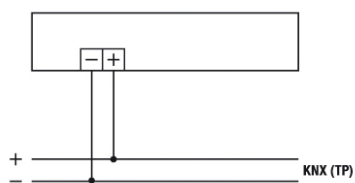

---

Standard operation

**Energy Conservation Solutions Pty Ltd**  
Exclusive Distributor for ESYLUX in Australia Locations:  
VIC/TAS, NSW, QLD, ACT, SA/NT & WA  
Phone: **1300 306 136**  
For contact details visit: [www.ecs.net.au](http://www.ecs.net.au)