



## **DATA SHEET**

### **AOL 100 LED 5K**

Order description

AOL 100 LED 5K white


Item number

GTIN

EL10750007

4015120750007





#### **Product description**

- Automatic light with built-in motion detector
- Design lamp made of die-cast aluminium and plastic
- 14 W, light colour approx. 5000 K white
- $140^{\circ}$  field of detection, range up to 10 m at an installation height of 1.8 m

#### Technical data

GENERAL	
Conformity	CE, RoHS, WEEE
warranty	3-year
MOUNTING	
Installation type	Surface mounting
Mounting location	Wall
HOUSING	
Dimensions	Length 143 mm x Width 104 mm x Height/ Depth 205 mm
Weight	570 g
Material	Aluminium and UV-stabilised plastic
Protection type	IP 55
Permissible ambient temperature	-25 °C+50 °C
Colour	white, similar to RAL 9016
Terminal	2,5 mm² / 1,5 mm²
Glow wire test in accordance with IEC 60695-2-10	650 °C - 30 s
ELECTRICAL VERSION	
Protection class	II

Nominal voltage	230 - 230 V / 50 Hz	
Stand-by consumption	0.5 W	
LIGHT		
Diffusor	opal	
Light emission	direkt	
Beam angle	90 °	
Flicker factor	<10 %	
Rated output	14 W	
Luminous Flux (light)	770 lm	
Luminous efficacy	55 lm/W	
LED service life	L80B10 = 50.000 h	
Colour temperature	5000 K	
Colour rendering index Ra	> 70	
Energy efficiency class	A++ to A	
SENSORS		
Detection angle	140°	
Detection range diagonally	10 m	
Field of detection	31 m²	
Recommended installation height	1.8 m	





# DATA SHEET

### **AOL 100 LED 5K**

Order description

Item number


GTIN


AOL 100 LED 5K white

EL10750007

4015120750007


#### Scale drawing



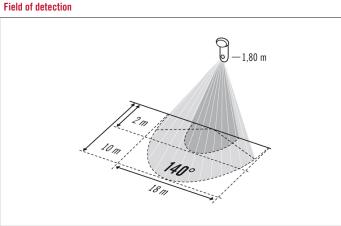


- Head-on to detector
- Passage area / diagonally to detector

#### **Light distribution**




#### Circuit diagram

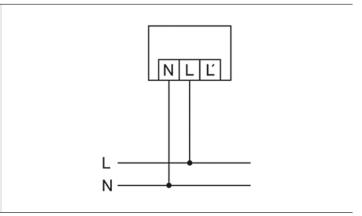

Standard operation

#### Circuit diagram



Standard operation with additional connection of external loads

#### **Energy Conservation Solutions Pty Ltd**

For contact details visit: www.ecs.net.au