

DATA SHEET

Order description


PDLISB04370840BKC00000000

Item number

E010306136

GTIN

4015120306136

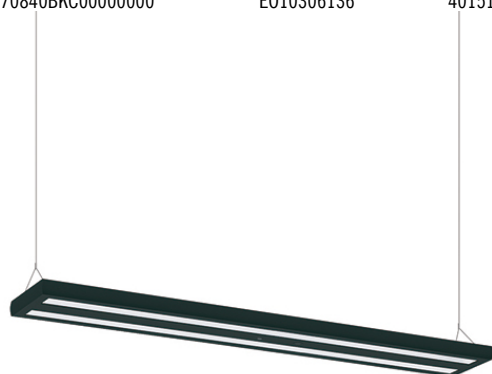

Product description

- LED pendant light, LED output 72 W, for workplace-oriented lighting in offices and meeting rooms with glare-free direct component and indirect light
- Sleek, timeless design
- Ballast (on/off) integrated
- High-quality housing, aluminium lamp bodies, anthracite powder coated
- Colour temperature 4000 K
- Excellent light quality, no flickering

Technical data


| GENERAL | |
|--|--|
| Conformity | CE, RoHS, WEEE |
| warranty | 5-year |
| MOUNTING | |
| Installation type | Pendant |
| Mounting location | Ceiling |
| HOUSING | |
| Dimensions | Length 1206 mm x Width 166 mm x Height/Depth 30 mm |
| Weight | 6000 g |
| Material | Aluminium |
| Surface finish | Powder-coated |
| Protection type | IP 20 |
| Permissible ambient temperature | 0 °C...+40 °C |
| Relative humidity | 5 - 93 %, non-condensing |
| Colour | Black grey, similar to RAL 7016 |
| Glow wire test in accordance with IEC 60695-2-10 | 650 °C - 30 s |

| ELECTRICAL VERSION | |
|---------------------------|-------------------------------|
| Protection class | I |
| Nominal voltage | 220 - 240 V / 50 - 60 Hz |
| Stand-by consumption | 0 W |
| LIGHT | |
| Diffusor | micro-prismatic / transparent |
| Light emission | direkt/indirekt |
| Beam angle | 80 ° |
| Unified Glare Rating | ≤ 19 |
| Flicker factor | <3 % |
| Rated output | 79 W |
| Luminous Flux (light) | 8630 lm |
| Luminous efficacy | 109 lm/W |
| LED service life | L80B10 = 50.000 h |
| Colour temperature | 4000 K |
| Colour rendering index Ra | > 80 |
| Colour tolerance | SDCM <3 |
| Color Quality Scale | CQS > 80 |
| Photobiological safety | Risk group 1 |
| Energy efficiency class | A++ to A |

DATA SHEET

| Order description | Item number | GTIN |
|---------------------------|-------------|---------------|
| PDLISB04370840BKC00000000 | E010306136 | 4015120306136 |

Scale drawing

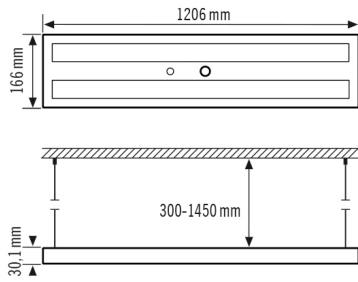

Light distribution

Energy Conservation Solutions Pty Ltd

Exclusive Distributor for ESYLUX in Australia Locations:

VIC/TAS, NSW, QLD, ACT, SA/NT & WA

Phone: **1300 306 136**

For contact details visit: www.ecs.net.au