

DATA SHEET

ALVA 180° 940 / 170 16W 4K ANTH. CLEAR AUT DALI

Order description


BL-ALV 50 018 840 ANT A D

Item number

EL10820946

GTIN

4015120820946

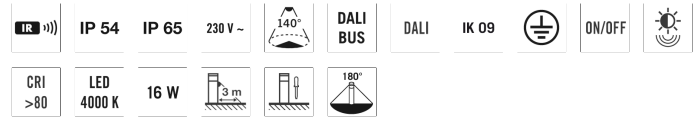

Product description

- LED DALI bollard light made from high-grade aluminium
- Dirt-repellent thanks to powder coating with lotus effect
- Integrated ballast (DALI), installation without further accessories
- High-quality housing, die-cast aluminium, charcoal grey powder-coated, similar to RAL 7016
- Colour temperature 4000 K

Technical data

GENERAL	
Conformity	CE, RoHS, WEEE
warranty	5-year
MOUNTING	
Installation type	Free standing
Installation position	Floor
HOUSING	
Dimensions	Height/Depth 940 mm, Ø 170 mm
Weight	8250 g
Housing material	powder-coated aluminium
Protection type	IP 65 (lamp head) IP 54 (connection box)
Permissible ambient temperature	-25 °C...+40 °C
Impact resistance	IK09
Colour	anthracite grey, similar to RAL 7016
Terminal	2,5 mm ² / 1,5 mm ²

ELECTRICAL VERSION

Protection class	I
Nominal voltage	230 - 230 V / 50 Hz

LIGHT

Diffusor	transparent
Light emission	Direct
Beam angle	159 °
Flicker factor	<10 %
Rated output	16,0 W
Luminous Flux (light)	720 lm
Luminous efficacy	45 lm/W
LED service life	L80B10 = 50.000 h
Colour temperature	4000 K
Colour rendering index Ra	> 80
Colour tolerance	SDCM <3
Color Quality Scale	80
Energy efficiency class	A++ to A

DATA SHEET


ALVA 180° 940 / 170 16W 4K ANTH. CLEAR AUT DALI

Order description	Item number	GTIN
BL-ALV 50 018 840 ANT A D	EL10820946	4015120820946


Accessories

Product designation	Item number	GTIN
Mobil-PDi/MDi-universal	EP10433993	4015120433993
ESY-Pen	EP10425356	4015120425356
Mobil-PDi/Dali	EP10425899	4015120425899
ALVA ground anchor operating instructions	EL10820083	4015120820083

Scale drawing




Field of detection



■ Passage area / diagonally to detector

Light distribution

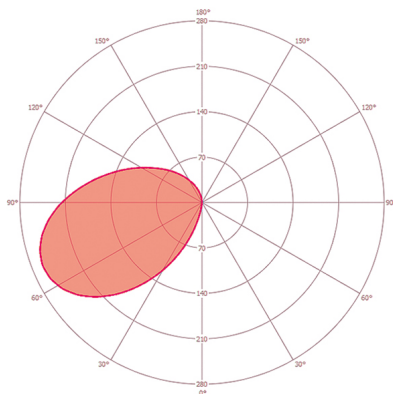

Energy Conservation Solutions Pty Ltd

Exclusive Distributor for ESYLUX in Australia Locations:

VIC/TAS, NSW, QLD, ACT, SA/NT & WA

Phone: **1300 306 136**

For contact details visit: www.ecs.net.au