

DATA SHEET

STELLA 600 33W 3000K PRISMATIC DALI

Order description	Item number	GTIN
PNLSTE10033830WHP0DALI000	EQ10600210	4015120600210



Product description

- LED light with prismatic (PRISMATIC) cover (diffuser)
- Can be used as a panel light in ceiling systems with concealed or visible mounting rails for system dimensions 600 mm x 600 mm
- LED output 33 W
- Integrated ballast (DALI), installation without further accessories
- Colour temperature approx. 3000 K (warm white)

Technical data

GENERAL	
Special product features	DALI
Conformity	CE, RoHS, WEEE
warranty	5-year
MOUNTING	
Installation type	Recessed mounting
Mounting location	Ceiling
Installation dimension	Installation length 595 mm x Installation width 595 mm x
HOUSING	
Dimensions	Length 600 mm x Width 600 mm x Height/Depth 9 mm
Weight	3500 g
Material	painted aluminium
Surface finish	frosted
Protection type	IP 20
Permissible ambient temperature	0 °C...+50 °C
Colour	white, similar to RAL 9003
Terminal	1.5 mm ²

Glow wire test in accordance with IEC 60695-2-10 650 °C - 30 s

ELECTRICAL VERSION

Protection class	II
Nominal voltage	110 - 240 V / 50 - 60 Hz

LIGHT

Diffusor	micro-prismatic / opal
Light emission	direkt
Beam angle	116 °
Unified Glare Rating	≤ 19
Flicker factor	<3%
Rated output	33 W
Luminous Flux (light)	3650 lm
Luminous efficacy	110 lm/W
LED service life	L80B50 = 50.000 h
Colour temperature	3000 K
Colour rendering index Ra	> 80
Colour tolerance	SDCM <3
Color Quality Scale	>80
Photobiological safety	Risk group 0
Energy efficiency class	A++ to A

DATA SHEET


STELLA 600 33W 3000K PRISMATIC DALI

Order description	Item number	GTIN
PNLSTE10033830WHP0DALI000	EQ10600210	4015120600210


Accessories

Product designation	Item number	GTIN
PNL STELLA 1200mm Pendulum set	EQ10600159	4015120600159
PNL STELLA 1000mm Pendulum set	EQ10600166	4015120600166
PNL STELLA 600 mounting frame SM WH SLIM	EQ10600173	4015120600173
PNL 600 UMF FM WH	EQ10113086	4015120113086
PNL drop protection	EQ10121616	4015120121616

Scale drawing

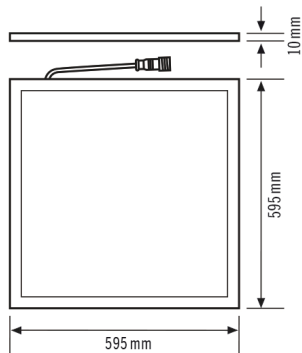

Light distribution

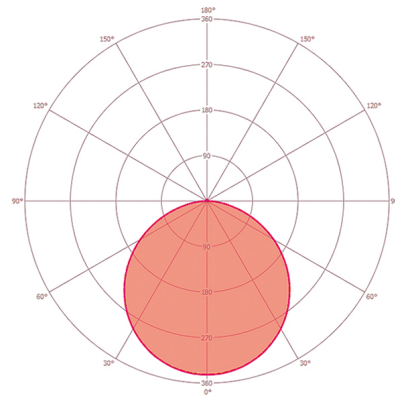

Energy Conservation Solutions Pty Ltd

Exclusive Distributor for ESYLUX in Australia Locations:

VIC/TAS, NSW, QLD, ACT, SA/NT & WA

Phone: **1300 306 136**

For contact details visit: www.ecs.net.au